

SAT and SMT Solving

Sarah Winkler

SS 2018

Department of Computer Science

University of Innsbruck

Outline

- Summary of Last Week
- Unsatisfiable Cores
- Algorithm by Fu and Malik
- Unsatisfiable Cores in Practice

Summary of Last Week

Maximum Satisfiability

Consider CNF formulas χ and φ as sets of clauses.

Definitions

- ▶ $\text{maxSAT}(\varphi)$ is maximal $|\psi|$ such that $\psi \subseteq \varphi$ and $\bigwedge_{C \in \psi} C$ satisfiable
- ▶ $\text{pmaxSAT}(\varphi, \chi)$ is maximal $|\psi|$ such that $\psi \subseteq \varphi$ and $\chi \wedge \bigwedge_{C \in \psi} C$ satisfiable

Definitions

given weights $w_C \in \mathbb{Z}$ for all $C \in \varphi$,

- ▶ $\text{maxSAT}_w(\varphi)$ is maximal $\sum_{C \in \psi} w_C$ such that $\psi \subseteq \varphi$ and $\bigwedge_{C \in \psi} C$ satisfiable
- ▶ $\text{pmaxSAT}_w(\varphi, \chi)$ is maximal $\sum_{C \in \psi} w_C$ such that $\psi \subseteq \varphi$ and $\chi \wedge \bigwedge_{C \in \psi} C$ satisfiable

Definition

$\text{minUNSAT}(\varphi)$ is minimal $|\psi|$ such that $\psi \subseteq \varphi$ and $\bigwedge_{C \in \psi} \neg C$ is satisfiable

Lemma

$$|\varphi| = |\text{minUNSAT}(\varphi)| + |\text{maxSAT}(\varphi)|$$

Branch & Bound

Idea

- ▶ gets list of clauses φ as input return $\text{minUNSAT}(\varphi)$
- ▶ explores assignments in depth-first search

Notation

- ▶ φ_x is formula φ with all occurrences of x replaced by T
- ▶ $\varphi_{\bar{x}}$ is formula φ with all occurrences of x F
- ▶ for list of clauses φ , function $\text{simp}(\varphi)$
 - ▶ replace $\neg T$ by F and $\neg F$ by T
 - ▶ drops all clauses which contain T
 - ▶ removes F from all remaining clauses
- ▶ \square denotes empty clause and $\#\text{empty}(\varphi)$ number of empty clauses in φ

Algorithm (Branch & Bound)

```
function BnB( $\varphi$ , UB)
   $\varphi$  = simp( $\varphi$ )
  if  $\varphi$  contains only empty clauses then
    return #empty( $\varphi$ )
  if #empty( $\varphi$ )  $\geq$  UB then
    return UB
  x = selectVariable( $\varphi$ )
  UB := min(UB, BnB( $\varphi_x$ , UB))
  return min(UB, BnB( $\varphi_{\bar{x}}$ , UB))
```

Theorem

$$\text{BnB}(\varphi, |\varphi|) = \text{minUNSAT}(\varphi)$$

Binary Search

Idea

- ▶ gets list of clauses φ as input and returns $\text{minUNSAT}(\varphi)$
- ▶ repeatedly call SAT solver in binary search fashion

Definitions

- ▶ cardinality constraint is

$$\sum_{x \in X} x \bowtie N$$

where \bowtie is $=$, $<$, $>$, \leq , or \geq , X is set of propositional variables, and $N \in \mathbb{N}$

- ▶ valuation v satisfies $\sum_{x \in X} x \bowtie N$ iff $k \bowtie N$
where k is number of variables $x \in X$ such that $v(x) = \text{T}$

Remark

cardinality constraints are expressible in CNF

Algorithm (Binary Search)

```
function BinarySearch( $\{C_1, \dots, C_m\}$ )  
   $\varphi := \{C_1 \vee b_1, \dots, C_m \vee b_m\}$   
  return search( $\varphi, 0, m$ )
```

b_1, \dots, b_m are fresh variables

```
function search( $\varphi, L, U$ )  
  if  $L \geq U$  then  
    return  $U$   
   $mid := \lfloor \frac{U+L}{2} \rfloor$   
  if SAT( $\varphi \wedge \text{CNF}(\sum_{i=1}^m b_i \leq mid)$ ) then  
    return search( $\varphi, L, mid$ )  
  else  
    return search( $\varphi, mid + 1, U$ )
```

Theorem

$\text{BinarySearch}(\varphi) = \min\text{UNSAT}(\varphi)$

Unsatisfiable Cores

Definitions

for unsatisfiable CNF formula φ given as set of clauses

- ▶ $\psi \subseteq \varphi$ such that $\bigwedge_{C \in \psi} C$ is unsatisfiable is **unsatisfiable core (UC)** of φ

Definitions

for unsatisfiable CNF formula φ given as set of clauses

- ▶ $\psi \subseteq \varphi$ such that $\bigwedge_{C \in \psi} C$ is unsatisfiable is **unsatisfiable core (UC)** of φ
- ▶ **minimal unsatisfiable core** ψ is UC such that every subset of ψ is satisfiable

Definitions

for unsatisfiable CNF formula φ given as set of clauses

- ▶ $\psi \subseteq \varphi$ such that $\bigwedge_{C \in \psi} C$ is unsatisfiable is **unsatisfiable core (UC)** of φ
- ▶ **minimal unsatisfiable core** ψ is UC such that every subset of ψ is satisfiable
- ▶ **MUC** (minimum unsatisfiable core) is UC such that $|\psi|$ is minimal

Definitions

for unsatisfiable CNF formula φ given as set of clauses

- ▶ $\psi \subseteq \varphi$ such that $\bigwedge_{C \in \psi} C$ is unsatisfiable is **unsatisfiable core (UC)** of φ
- ▶ **minimal unsatisfiable core** ψ is UC such that every subset of ψ is satisfiable
- ▶ **MUC (minimum unsatisfiable core)** is UC such that $|\psi|$ is minimal

Example

$$\varphi = \{\neg x, \quad x \vee z, \quad \neg y \vee \neg z, \quad x, \quad y \vee \neg z\}$$

Definitions

for unsatisfiable CNF formula φ given as set of clauses

- ▶ $\psi \subseteq \varphi$ such that $\bigwedge_{C \in \psi} C$ is unsatisfiable is **unsatisfiable core (UC)** of φ
- ▶ **minimal unsatisfiable core** ψ is UC such that every subset of ψ is satisfiable
- ▶ **MUC** (minimum unsatisfiable core) is UC such that $|\psi|$ is minimal

Example

$$\varphi = \{\neg x, \quad x \vee z, \quad \neg y \vee \neg z, \quad x, \quad y \vee \neg z\}$$

unsatisfiable cores are

- ▶ φ

Definitions

for unsatisfiable CNF formula φ given as set of clauses

- ▶ $\psi \subseteq \varphi$ such that $\bigwedge_{C \in \psi} C$ is unsatisfiable is **unsatisfiable core (UC)** of φ
- ▶ **minimal unsatisfiable core** ψ is UC such that every subset of ψ is satisfiable
- ▶ **MUC** (minimum unsatisfiable core) is UC such that $|\psi|$ is minimal

Example

$$\varphi = \{ \neg x, \quad x \vee z, \quad \neg y \vee \neg z, \quad x, \quad y \vee \neg z \}$$

unsatisfiable cores are

- ▶ φ
- ▶ $\{ \neg x, x \vee z, \neg y \vee \neg z, y \vee \neg z \}$

Definitions

for unsatisfiable CNF formula φ given as set of clauses

- ▶ $\psi \subseteq \varphi$ such that $\bigwedge_{C \in \psi} C$ is unsatisfiable is **unsatisfiable core (UC)** of φ
- ▶ **minimal unsatisfiable core** ψ is UC such that every subset of ψ is satisfiable
- ▶ **MUC** (minimum unsatisfiable core) is UC such that $|\psi|$ is minimal

Example

$$\varphi = \{ \neg x, \quad x \vee z, \quad \neg y \vee \neg z, \quad x, \quad y \vee \neg z \}$$

unsatisfiable cores are

- ▶ φ
- ▶ $\{ \neg x, x \vee z, \neg y \vee \neg z, y \vee \neg z \}$ minimal

Definitions

for unsatisfiable CNF formula φ given as set of clauses

- ▶ $\psi \subseteq \varphi$ such that $\bigwedge_{C \in \psi} C$ is unsatisfiable is **unsatisfiable core (UC)** of φ
- ▶ **minimal unsatisfiable core** ψ is UC such that every subset of ψ is satisfiable
- ▶ **MUC** (minimum unsatisfiable core) is UC such that $|\psi|$ is minimal

Example

$$\varphi = \{ \neg x, \quad x \vee z, \quad \neg y \vee \neg z, \quad x, \quad y \vee \neg z \}$$

unsatisfiable cores are

- ▶ φ
- ▶ $\{ \neg x, x \vee z, \neg y \vee \neg z, y \vee \neg z \}$ minimal
- ▶ $\{ \neg x, x \}$

Definitions

for unsatisfiable CNF formula φ given as set of clauses

- ▶ $\psi \subseteq \varphi$ such that $\bigwedge_{C \in \psi} C$ is unsatisfiable is **unsatisfiable core (UC)** of φ
- ▶ **minimal unsatisfiable core** ψ is UC such that every subset of ψ is satisfiable
- ▶ **MUC** (minimum unsatisfiable core) is UC such that $|\psi|$ is minimal

Example

$$\varphi = \{ \neg x, \quad x \vee z, \quad \neg y \vee \neg z, \quad x, \quad y \vee \neg z \}$$

unsatisfiable cores are

- ▶ φ
- ▶ $\{ \neg x, x \vee z, \neg y \vee \neg z, y \vee \neg z \}$ minimal
- ▶ $\{ \neg x, x \}$ minimal and MUC

Definitions

for unsatisfiable CNF formula φ given as set of clauses

- ▶ $\psi \subseteq \varphi$ such that $\bigwedge_{C \in \psi} C$ is unsatisfiable is **unsatisfiable core (UC)** of φ
- ▶ **minimal unsatisfiable core** ψ is UC such that every subset of ψ is satisfiable
- ▶ **MUC** (minimum unsatisfiable core) is UC such that $|\psi|$ is minimal

Example

$$\varphi = \{ \neg x, \quad x \vee z, \quad \neg y \vee \neg z, \quad x, \quad y \vee \neg z \}$$

unsatisfiable cores are

- ▶ φ
- ▶ $\{ \neg x, x \vee z, \neg y \vee \neg z, y \vee \neg z \}$ minimal
- ▶ $\{ \neg x, x \}$ minimal and MUC

Remark

MUC is always minimal unsatisfiable core

Example

$$\varphi = \{C_1, \dots, C_6\}$$

$$C_1: x_1 \vee \neg x_3$$


$$C_2: x_2$$

$$C_3: \neg x_2 \vee x_3$$

$$C_4: \neg x_2 \vee \neg x_3$$

$$C_5: x_2 \vee x_3$$

$$C_6: \neg x_1 \vee x_2 \vee \neg x_3$$



Example

$$\varphi = \{C_1, \dots, C_6\}$$

$$C_1: x_1 \vee \neg x_3$$

$$C_2: x_2$$


$$C_3: \neg x_2 \vee x_3$$

$$C_4: \neg x_2 \vee \neg x_3$$

$$C_5: x_2 \vee x_3$$

$$C_6: \neg x_1 \vee x_2 \vee \neg x_3$$

φ has 9 unsatisfiable cores:



$$UC_1 = \{C_1, C_2, C_3, C_4, C_5, C_6\}$$

Example

$$\varphi = \{C_1, \dots, C_6\}$$

$$C_1: x_1 \vee \neg x_3$$

$$C_2: x_2$$


$$C_3: \neg x_2 \vee x_3$$

$$C_4: \neg x_2 \vee \neg x_3$$

$$C_5: x_2 \vee x_3$$

$$C_6: \neg x_1 \vee x_2 \vee \neg x_3$$

φ has 9 unsatisfiable cores:



$$UC_1 = \{C_1, C_2, C_3, C_4, C_5, C_6\}$$

$$UC_2 = \{C_1, C_2, C_3, C_4, C_5\}$$

Example

$$\varphi = \{C_1, \dots, C_6\}$$

$$C_1: x_1 \vee \neg x_3$$

$$C_2: x_2$$


$$C_3: \neg x_2 \vee x_3$$

$$C_4: \neg x_2 \vee \neg x_3$$

$$C_5: x_2 \vee x_3$$

$$C_6: \neg x_1 \vee x_2 \vee \neg x_3$$

φ has 9 unsatisfiable cores:



$$UC_1 = \{C_1, C_2, C_3, C_4, C_5, C_6\}$$

$$UC_2 = \{C_1, C_2, C_3, C_4, C_5\}$$

$$UC_3 = \{C_1, C_2, C_3, C_4, C_6\}$$

Example

$$\varphi = \{C_1, \dots, C_6\}$$

$$C_1: x_1 \vee \neg x_3$$

$$C_2: x_2$$


$$C_3: \neg x_2 \vee x_3$$

$$C_4: \neg x_2 \vee \neg x_3$$

$$C_5: x_2 \vee x_3$$

$$C_6: \neg x_1 \vee x_2 \vee \neg x_3$$

φ has 9 unsatisfiable cores:



$$UC_1 = \{C_1, C_2, C_3, C_4, C_5, C_6\}$$

$$UC_2 = \{C_1, C_2, C_3, C_4, C_5\}$$

$$UC_3 = \{C_1, C_2, C_3, C_4, C_6\}$$

$$UC_4 = \{C_1, C_3, C_4, C_5, C_6\}$$

Example

$$\varphi = \{C_1, \dots, C_6\}$$

$$C_1: x_1 \vee \neg x_3$$

$$C_2: x_2$$


$$C_3: \neg x_2 \vee x_3$$

$$C_4: \neg x_2 \vee \neg x_3$$

$$C_5: x_2 \vee x_3$$

$$C_6: \neg x_1 \vee x_2 \vee \neg x_3$$

φ has 9 unsatisfiable cores:



$$UC_1 = \{C_1, C_2, C_3, C_4, C_5, C_6\}$$

$$UC_2 = \{C_1, C_2, C_3, C_4, C_5\}$$

$$UC_3 = \{C_1, C_2, C_3, C_4, C_6\}$$

$$UC_4 = \{C_1, C_3, C_4, C_5, C_6\}$$

$$UC_5 = \{C_2, C_3, C_4, C_5, C_6\}$$

Example

$$\varphi = \{C_1, \dots, C_6\}$$

$$C_1: x_1 \vee \neg x_3$$

$$C_2: x_2$$


$$C_3: \neg x_2 \vee x_3$$

$$C_4: \neg x_2 \vee \neg x_3$$

$$C_5: x_2 \vee x_3$$

$$C_6: \neg x_1 \vee x_2 \vee \neg x_3$$

φ has 9 unsatisfiable cores:



$$UC_1 = \{C_1, C_2, C_3, C_4, C_5, C_6\}$$

$$UC_2 = \{C_1, C_2, C_3, C_4, C_5\}$$

$$UC_3 = \{C_1, C_2, C_3, C_4, C_6\}$$

$$UC_4 = \{C_1, C_3, C_4, C_5, C_6\}$$

$$UC_5 = \{C_2, C_3, C_4, C_5, C_6\}$$

$$UC_6 = \{C_1, C_2, C_3, C_4\}$$

Example

$$\varphi = \{C_1, \dots, C_6\}$$

$$C_1: x_1 \vee \neg x_3$$

$$C_2: x_2$$


$$C_3: \neg x_2 \vee x_3$$

$$C_4: \neg x_2 \vee \neg x_3$$

$$C_5: x_2 \vee x_3$$

$$C_6: \neg x_1 \vee x_2 \vee \neg x_3$$

φ has 9 unsatisfiable cores:



$$UC_1 = \{C_1, C_2, C_3, C_4, C_5, C_6\}$$

$$UC_2 = \{C_1, C_2, C_3, C_4, C_5\}$$

$$UC_3 = \{C_1, C_2, C_3, C_4, C_6\}$$

$$UC_4 = \{C_1, C_3, C_4, C_5, C_6\}$$

$$UC_5 = \{C_2, C_3, C_4, C_5, C_6\}$$

$$UC_6 = \{C_1, C_2, C_3, C_4\}$$

$$UC_7 = \{C_2, C_3, C_4, C_5\}$$

Example

$$\varphi = \{C_1, \dots, C_6\}$$

$$C_1: x_1 \vee \neg x_3$$

$$C_2: x_2$$


$$C_3: \neg x_2 \vee x_3$$

$$C_4: \neg x_2 \vee \neg x_3$$

$$C_5: x_2 \vee x_3$$

$$C_6: \neg x_1 \vee x_2 \vee \neg x_3$$

φ has 9 unsatisfiable cores:



$$UC_1 = \{C_1, C_2, C_3, C_4, C_5, C_6\}$$

$$UC_2 = \{C_1, C_2, C_3, C_4, C_5\}$$

$$UC_3 = \{C_1, C_2, C_3, C_4, C_6\}$$

$$UC_4 = \{C_1, C_3, C_4, C_5, C_6\}$$

$$UC_5 = \{C_2, C_3, C_4, C_5, C_6\}$$

$$UC_6 = \{C_1, C_2, C_3, C_4\}$$

$$UC_7 = \{C_2, C_3, C_4, C_5\}$$

$$UC_8 = \{C_2, C_3, C_4, C_6\}$$

Example

$$\varphi = \{C_1, \dots, C_6\}$$

$$C_1: x_1 \vee \neg x_3$$

$$C_2: x_2$$


$$C_3: \neg x_2 \vee x_3$$

$$C_4: \neg x_2 \vee \neg x_3$$

$$C_5: x_2 \vee x_3$$

$$C_6: \neg x_1 \vee x_2 \vee \neg x_3$$

φ has 9 unsatisfiable cores:



$$UC_1 = \{C_1, C_2, C_3, C_4, C_5, C_6\}$$

$$UC_2 = \{C_1, C_2, C_3, C_4, C_5\}$$

$$UC_3 = \{C_1, C_2, C_3, C_4, C_6\}$$

$$UC_4 = \{C_1, C_3, C_4, C_5, C_6\}$$

$$UC_5 = \{C_2, C_3, C_4, C_5, C_6\}$$

$$UC_6 = \{C_1, C_2, C_3, C_4\}$$

$$UC_7 = \{C_2, C_3, C_4, C_5\}$$

$$UC_8 = \{C_2, C_3, C_4, C_6\}$$

$$UC_9 = \{C_2, C_3, C_4\}$$

minimal and MUC

Application: FPGA Routing

Field Programmable Gate Arrays (FPGAs)

- ▶ can simulate microprocessors but faster for special tasks (from complex combinatorics to mere logic)



Application: FPGA Routing

Field Programmable Gate Arrays (FPGAs)


- ▶ can simulate microprocessors but faster for special tasks (from complex combinatorics to mere logic)
- ▶ logic blocks connected by “routing channels”



Application: FPGA Routing

Field Programmable Gate Arrays (FPGAs)


- ▶ can simulate microprocessors but faster for special tasks (from complex combinatorics to mere logic)
- ▶ logic blocks connected by “routing channels”



Application: FPGA Routing

Field Programmable Gate Arrays (FPGAs)


- ▶ can simulate microprocessors but faster for special tasks (from complex combinatorics to mere logic)
- ▶ logic blocks connected by “routing channels”
- ▶ “routing”: determine which channels are used for what



Application: FPGA Routing


Field Programmable Gate Arrays (FPGAs)

- ▶ can simulate microprocessors but faster for special tasks (from complex combinatorics to mere logic)
- ▶ logic blocks connected by “routing channels”
- ▶ “routing”: determine which channels are used for what



Example (Encoding Routing Requirements)


- ▶ consider connections a, b, c, d, e of 2 bits each



Application: FPGA Routing

Field Programmable Gate Arrays (FPGAs)

- ▶ can simulate microprocessors but faster for special tasks (from complex combinatorics to mere logic)
- ▶ logic blocks connected by “routing channels”
- ▶ “routing”: determine which channels are used for what



Example (Encoding Routing Requirements)

- ▶ consider connections a, b, c, d, e of 2 bits each
- ▶ **liveness**: want to route ≥ 1 bit of a, b, c, d, e


$a_0 \vee a_1$

$b_0 \vee b_1$

$c_0 \vee c_1$

$d_0 \vee d_1$


$e_0 \vee e_1$



Application: FPGA Routing

Field Programmable Gate Arrays (FPGAs)


- ▶ can simulate microprocessors but faster for special tasks (from complex combinatorics to mere logic)
- ▶ logic blocks connected by “routing channels”
- ▶ “routing”: determine which channels are used for what



Example (Encoding Routing Requirements)

- ▶ consider connections a, b, c, d, e of 2 bits each
- ▶ liveness: want to route ≥ 1 bit of a, b, c, d, e
- ▶ 2 routing channels of 2 tracks each
- ▶ **exclusivity**: each channel has only 2 tracks


$$\begin{array}{lll} a_0 \vee a_1 & \neg a_0 \vee \neg b_0 & \neg c_0 \vee \neg d_0 \\ b_0 \vee b_1 & \neg a_0 \vee \neg c_0 & \neg c_0 \vee \neg e_0 \\ c_0 \vee c_1 & \neg b_0 \vee \neg c_0 & \neg d_0 \vee \neg e_0 \\ d_0 \vee d_1 & \neg a_1 \vee \neg b_1 & \neg c_1 \vee \neg d_1 \\ e_0 \vee e_1 & \neg a_1 \vee \neg c_1 & \neg c_1 \vee \neg e_1 \\ & \neg b_1 \vee \neg c_1 & \neg d_1 \vee \neg e_1 \end{array}$$



Application: FPGA Routing

Field Programmable Gate Arrays (FPGAs)


- ▶ can simulate microprocessors but faster for special tasks (from complex combinatorics to mere logic)
- ▶ logic blocks connected by “routing channels”
- ▶ “routing”: determine which channels are used for what



Example (Encoding Routing Requirements)

- ▶ consider connections a, b, c, d, e of 2 bits each
- ▶ liveness: want to route ≥ 1 bit of a, b, c, d, e
- ▶ 2 routing channels of 2 tracks each
- ▶ exclusivity: each channel has only 2 tracks
- ▶ **unsatisfiable**: UCs indicate problems


$a_0 \vee a_1$	$\neg a_0 \vee \neg b_0$	$\neg c_0 \vee \neg d_0$
$b_0 \vee b_1$	$\neg a_0 \vee \neg c_0$	$\neg c_0 \vee \neg e_0$
$c_0 \vee c_1$	$\neg b_0 \vee \neg c_0$	$\neg d_0 \vee \neg e_0$
$d_0 \vee d_1$	$\neg a_1 \vee \neg b_1$	$\neg c_1 \vee \neg d_1$
$e_0 \vee e_1$	$\neg a_1 \vee \neg c_1$	$\neg c_1 \vee \neg e_1$
	$\neg b_1 \vee \neg c_1$	$\neg d_1 \vee \neg e_1$



Application: FPGA Routing

Field Programmable Gate Arrays (FPGAs)


- ▶ can simulate microprocessors but faster for special tasks (from complex combinatorics to mere logic)
- ▶ logic blocks connected by “routing channels”
- ▶ “routing”: determine which channels are used for what



Example (Encoding Routing Requirements)

- ▶ consider connections a, b, c, d, e of 2 bits each
- ▶ liveness: want to route ≥ 1 bit of a, b, c, d, e
- ▶ 2 routing channels of 2 tracks each
- ▶ exclusivity: each channel has only 2 tracks
- ▶ unsatisfiable: UCs indicate problems

$a_0 \vee a_1$	●	$\neg a_0 \vee \neg b_0$	●	$\neg c_0 \vee \neg d_0$
$b_0 \vee b_1$	●	$\neg a_0 \vee \neg c_0$	●	$\neg c_0 \vee \neg e_0$
$c_0 \vee c_1$	●	$\neg b_0 \vee \neg c_0$	●	$\neg d_0 \vee \neg e_0$
$d_0 \vee d_1$		$\neg a_1 \vee \neg b_1$	●	$\neg c_1 \vee \neg d_1$
$e_0 \vee e_1$		$\neg a_1 \vee \neg c_1$	●	$\neg c_1 \vee \neg e_1$
		$\neg b_1 \vee \neg c_1$	●	$\neg d_1 \vee \neg e_1$




UC_1 : channel 1 capacity exceeded

Application: FPGA Routing

Field Programmable Gate Arrays (FPGAs)


- ▶ can simulate microprocessors but faster for special tasks (from complex combinatorics to mere logic)
- ▶ logic blocks connected by “routing channels”
- ▶ “routing”: determine which channels are used for what



Example (Encoding Routing Requirements)

- ▶ consider connections a, b, c, d, e of 2 bits each
- ▶ liveness: want to route ≥ 1 bit of a, b, c, d, e
- ▶ 2 routing channels of 2 tracks each
- ▶ exclusivity: each channel has only 2 tracks
- ▶ unsatisfiable: UCs indicate problems

$a_0 \vee a_1$ ●	$\neg a_0 \vee \neg b_0$ ●	$\neg c_0 \vee \neg d_0$ ●
$b_0 \vee b_1$ ●	$\neg a_0 \vee \neg c_0$ ●	$\neg c_0 \vee \neg e_0$ ●
$c_0 \vee c_1$ ●●	$\neg b_0 \vee \neg c_0$ ●	$\neg d_0 \vee \neg e_0$ ●
$d_0 \vee d_1$ ●	$\neg a_1 \vee \neg b_1$ ●	$\neg c_1 \vee \neg d_1$ ●
$e_0 \vee e_1$ ●	$\neg a_1 \vee \neg c_1$ ●	$\neg c_1 \vee \neg e_1$ ●
	$\neg b_1 \vee \neg c_1$ ●	$\neg d_1 \vee \neg e_1$ ●




UC_1 : channel 1 capacity exceeded

UC_2 : channel 2 capacity exceeded

Application: FPGA Routing

Field Programmable Gate Arrays (FPGAs)


- ▶ can simulate microprocessors but faster for special tasks (from complex combinatorics to mere logic)
- ▶ logic blocks connected by “routing channels”
- ▶ “routing”: determine which channels are used for what



Example (Encoding Routing Requirements)

- ▶ consider connections a, b, c, d, e of 2 bits each
- ▶ liveness: want to route ≥ 1 bit of a, b, c, d, e
- ▶ 2 routing channels of 2 tracks each
- ▶ exclusivity: each channel has only 2 tracks
- ▶ unsatisfiable: UCs indicate problems

$a_0 \vee a_1$	●●	$\neg a_0 \vee \neg b_0$	●	$\neg c_0 \vee \neg d_0$	●
$b_0 \vee b_1$	●●	$\neg a_0 \vee \neg c_0$	●●	$\neg c_0 \vee \neg e_0$	●
$c_0 \vee c_1$	●●●	$\neg b_0 \vee \neg c_0$	●●	$\neg d_0 \vee \neg e_0$	●●
$d_0 \vee d_1$	●●	$\neg a_1 \vee \neg b_1$	●●	$\neg c_1 \vee \neg d_1$	●●
$e_0 \vee e_1$	●●	$\neg a_1 \vee \neg c_1$	●	$\neg c_1 \vee \neg e_1$	●●
		$\neg b_1 \vee \neg c_1$	●	$\neg d_1 \vee \neg e_1$	●



UC_1 : channel 1 capacity exceeded


UC_2 : channel 2 capacity exceeded

UC_3 : c is overconstrained

Application: FPGA Routing

Field Programmable Gate Arrays (FPGAs)

- ▶ can simulate microprocessors but faster for special tasks (from complex combinatorics to mere logic)
- ▶ logic blocks connected by “routing channels”
- ▶ “routing”: determine which channels are used for what



Example (Encoding Routing Requirements)

- ▶ consider connections a, b, c, d, e of 2 bits each
- ▶ liveness: want to route ≥ 1 bit of a, b, c, d, e
- ▶ 2 routing channels of 2 tracks each
- ▶ exclusivity: each channel has only 2 tracks
- ▶ unsatisfiable: UCs indicate problems

$$a_0 \vee a_1 \quad \bullet \bullet \bullet \quad \neg a_0 \vee \neg b_0 \quad \bullet \bullet \quad \neg c_0 \vee \neg d_0 \quad \bullet \bullet$$


$$b_0 \vee b_1 \quad \bullet \bullet \bullet \quad \neg a_0 \vee \neg c_0 \quad \bullet \bullet \quad \neg c_0 \vee \neg e_0 \quad \bullet \bullet$$

$$c_0 \vee c_1 \quad \bullet \bullet \bullet \bullet \quad \neg b_0 \vee \neg c_0 \quad \bullet \bullet \quad \neg d_0 \vee \neg e_0 \quad \bullet \bullet$$

$$d_0 \vee d_1 \quad \bullet \bullet \bullet \quad \neg a_1 \vee \neg b_1 \quad \bullet \bullet \quad \neg c_1 \vee \neg d_1 \quad \bullet \bullet$$

$$e_0 \vee e_1 \quad \bullet \bullet \bullet \quad \neg a_1 \vee \neg c_1 \quad \bullet \bullet \quad \neg c_1 \vee \neg e_1 \quad \bullet \bullet$$

$$\neg b_1 \vee \neg c_1 \quad \bullet \bullet \quad \neg d_1 \vee \neg e_1 \quad \bullet \bullet$$



UC_1 : channel 1 capacity exceeded

UC_2 : channel 2 capacity exceeded

UC_3 : c is overconstrained

UC_4 : c is overconstrained

Application: FPGA Routing

Field Programmable Gate Arrays (FPGAs)

- ▶ can simulate microprocessors but faster for special tasks (from complex combinatorics to mere logic)
- ▶ logic blocks connected by “routing channels”
- ▶ “routing”: determine which channels are used for what



Example (Encoding Routing Requirements)

- ▶ consider connections a, b, c, d, e of 2 bits each
- ▶ liveness: want to route ≥ 1 bit of a, b, c, d, e
- ▶ 2 routing channels of 2 tracks each
- ▶ exclusivity: each channel has only 2 tracks
- ▶ unsatisfiable: UCs indicate problems

$$a_0 \vee a_1 \quad \bullet \bullet \bullet \quad \neg a_0 \vee \neg b_0 \quad \bullet \bullet \quad \neg c_0 \vee \neg d_0 \quad \bullet \bullet$$


$$b_0 \vee b_1 \quad \bullet \bullet \bullet \quad \neg a_0 \vee \neg c_0 \quad \bullet \bullet \quad \neg c_0 \vee \neg e_0 \quad \bullet \bullet$$

$$c_0 \vee c_1 \quad \bullet \bullet \bullet \bullet \quad \neg b_0 \vee \neg c_0 \quad \bullet \bullet \quad \neg d_0 \vee \neg e_0 \quad \bullet \bullet$$

$$d_0 \vee d_1 \quad \bullet \bullet \bullet \quad \neg a_1 \vee \neg b_1 \quad \bullet \bullet \quad \neg c_1 \vee \neg d_1 \quad \bullet \bullet$$

$$e_0 \vee e_1 \quad \bullet \bullet \bullet \quad \neg a_1 \vee \neg c_1 \quad \bullet \bullet \quad \neg c_1 \vee \neg e_1 \quad \bullet \bullet$$

$$\neg b_1 \vee \neg c_1 \quad \bullet \bullet \quad \neg d_1 \vee \neg e_1 \quad \bullet \bullet$$



UC_1 : channel 1 capacity exceeded

UC_2 : channel 2 capacity exceeded

UC_3 : c is overconstrained

UC_4 : c is overconstrained

Finding Minimal Unsatisfiable Cores by Resolution

Idea

- ▶ repeatedly pick clause C from φ and check satisfiability:
if $\varphi \setminus \{C\}$ is satisfiable, keep C , otherwise drop C

Finding Minimal Unsatisfiable Cores by Resolution

Idea


- ▶ repeatedly pick clause C from φ and check satisfiability:
if $\varphi \setminus \{C\}$ is satisfiable, keep C , otherwise drop C
- ▶ SAT solvers can give **resolution proof** if conflict detected:
use resolution graphs for more efficient implementation of this idea

Finding Minimal Unsatisfiable Cores by Resolution

Idea

- ▶ repeatedly pick clause C from φ and check satisfiability:
if $\varphi \setminus \{C\}$ is satisfiable, keep C , otherwise drop C
- ▶ SAT solvers can give resolution proof if conflict detected:
use resolution graphs for more efficient implementation of this idea

Example (Resolution Graph)

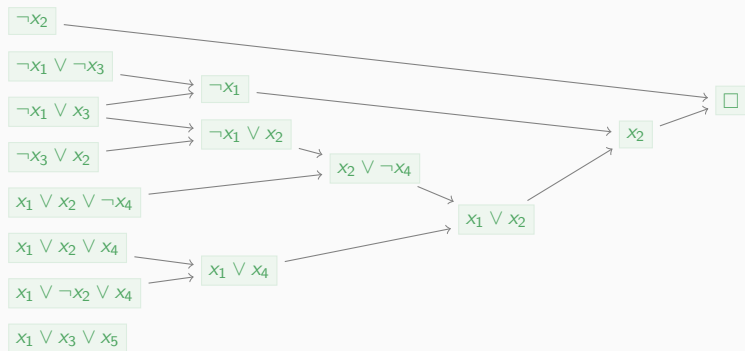


Finding Minimal Unsatisfiable Cores by Resolution

Idea

- ▶ repeatedly pick clause C from φ and check satisfiability:
if $\varphi \setminus \{C\}$ is satisfiable, keep C , otherwise drop C
- ▶ SAT solvers can give resolution proof if conflict detected:
use resolution graphs for more efficient implementation of this idea

Example (Resolution Graph)

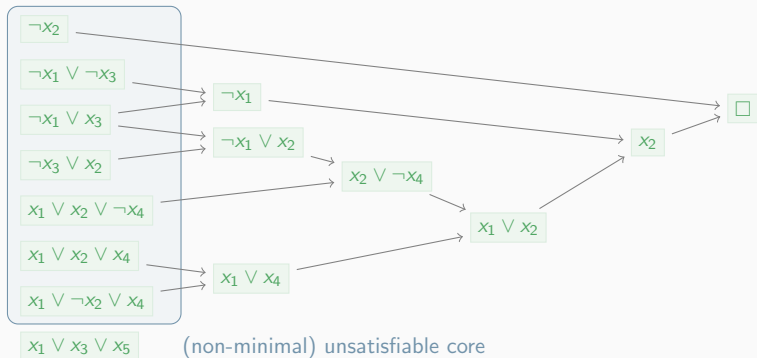

Definition (Resolution Graph)

directed acyclic graph $G = (V, E)$ is resolution graph for set of clauses φ

Definition (Resolution Graph)

directed acyclic graph $G = (V, E)$ is resolution graph for set of clauses φ if

1. $V = V_i \uplus V_c$ is set of clauses and $V_i = \varphi$,

Definition (Resolution Graph)

directed acyclic graph $G = (V, E)$ is resolution graph for set of clauses φ if

1. $V = V_i \uplus V_c$ is set of clauses and $V_i = \varphi$,
2. V_i nodes have no incoming edges,

initial nodes

Definition (Resolution Graph)

directed acyclic graph $G = (V, E)$ is resolution graph for set of clauses φ if

1. $V = V_i \uplus V_c$ is set of clauses and $V_i = \varphi$,
2. V_i nodes have no incoming edges,
3. there is exactly one node \square without outgoing edges,

initial nodes

Definition (Resolution Graph)

directed acyclic graph $G = (V, E)$ is resolution graph for set of clauses φ if

1. $V = V_i \uplus V_c$ is set of clauses and $V_i = \varphi$,
2. V_i nodes have no incoming edges, initial nodes
3. there is exactly one node \square without outgoing edges,
4. $\forall C \in V_c \exists$ edges $D \rightarrow C, D' \rightarrow C$ such that C is resolvent of D and D' , and

Definition (Resolution Graph)

directed acyclic graph $G = (V, E)$ is resolution graph for set of clauses φ if

1. $V = V_i \uplus V_c$ is set of clauses and $V_i = \varphi$,
2. V_i nodes have no incoming edges, initial nodes
3. there is exactly one node \square without outgoing edges,
4. $\forall C \in V_c \exists$ edges $D \rightarrow C, D' \rightarrow C$ such that C is resolvent of D and D' , and
5. there are no other edges.

Definition (Resolution Graph)

directed acyclic graph $G = (V, E)$ is resolution graph for set of clauses φ if

1. $V = V_i \uplus V_c$ is set of clauses and $V_i = \varphi$,
2. V_i nodes have no incoming edges, initial nodes
3. there is exactly one node \square without outgoing edges,
4. $\forall C \in V_c \exists$ edges $D \rightarrow C, D' \rightarrow C$ such that C is resolvent of D and D' , and
5. there are no other edges.

Notation

- ▶ $Reach_G(C)$ is set of nodes reachable from C in G

Definition (Resolution Graph)

directed acyclic graph $G = (V, E)$ is resolution graph for set of clauses φ if

1. $V = V_i \uplus V_c$ is set of clauses and $V_i = \varphi$,
2. V_i nodes have no incoming edges, initial nodes
3. there is exactly one node \square without outgoing edges,
4. $\forall C \in V_c \exists$ edges $D \rightarrow C, D' \rightarrow C$ such that C is resolvent of D and D' , and
5. there are no other edges.

Notation

- ▶ $Reach_G(C)$ is set of nodes reachable from C in G
- ▶ $Reach_G^E(C)$ is set of edges reachable from C in G

Definition (Resolution Graph)

directed acyclic graph $G = (V, E)$ is resolution graph for set of clauses φ if

1. $V = V_i \uplus V_c$ is set of clauses and $V_i = \varphi$,
2. V_i nodes have no incoming edges, initial nodes
3. there is exactly one node \square without outgoing edges,
4. $\forall C \in V_c \exists$ edges $D \rightarrow C, D' \rightarrow C$ such that C is resolvent of D and D' , and
5. there are no other edges.

Notation

- ▶ $Reach_G(C)$ is set of nodes reachable from C in G
- ▶ $Reach_G^E(C)$ is set of edges reachable from C in G
- ▶ $BReach(C)$ is set of nodes backwards reachable from C in G

Definition (Resolution Graph)

directed acyclic graph $G = (V, E)$ is resolution graph for set of clauses φ if

1. $V = V_i \uplus V_c$ is set of clauses and $V_i = \varphi$,
2. V_i nodes have no incoming edges, initial nodes
3. there is exactly one node \square without outgoing edges,
4. $\forall C \in V_c \exists$ edges $D \rightarrow C, D' \rightarrow C$ such that C is resolvent of D and D' , and
5. there are no other edges.

Notation

- ▶ $Reach_G(C)$ is set of nodes reachable from C in G
- ▶ $Reach_G^E(C)$ is set of edges reachable from C in G
- ▶ $BReach(C)$ is set of nodes backwards reachable from C in G
- ▶ \overline{N} is $V \setminus N$ for any set of nodes N

Algorithm $\text{minUnsatCore}(\varphi)$

Input: **unsatisfiable formula** φ **Output:** minimal unsatisfiable core of φ build refutation graph $G = (V_i \uplus V_c, E)$ for φ **while** \exists unmarked clause in V_i **do** $C \leftarrow$ unmarked clause in V_i **if** $\text{SAT}(\overline{\text{Reach}_G(C)})$ **then** \triangleright subgraph without C satisfiable? mark C $\triangleright C$ is UC member **else** build refutation graph $G' = (V'_i \uplus V'_c, E')$ for $\overline{\text{Reach}_G(C)}$ $V_i \leftarrow V_i \setminus \{C\}$ and $V_c \leftarrow V'_c \cup (V_c \setminus \text{Reach}_G(C))$ $E \leftarrow E' \cup (E \setminus \text{Reach}_G^E(C))$ $G \leftarrow (V_i \cup V_c, E)$ $G \leftarrow G|_{B\text{Reach}_G(\square)}$ \triangleright restrict to nodes with path to \square return V_i

Algorithm $\text{minUnsatCore}(\varphi)$

Input: unsatisfiable formula φ

Output: minimal unsatisfiable core of φ

build refutation graph $G = (V_i \uplus V_c, E)$ for φ

while \exists unmarked clause in V_i **do**

$C \leftarrow$ unmarked clause in V_i

if $\text{SAT}(\overline{\text{Reach}_G(C)})$ **then**

\triangleright subgraph without C satisfiable?

 mark C

$\triangleright C$ is UC member

else

 build refutation graph $G' = (V'_i \uplus V'_c, E')$ for $\overline{\text{Reach}_G(C)}$

$V_i \leftarrow V_i \setminus \{C\}$ and $V_c \leftarrow V'_c \cup (V_c \setminus \text{Reach}_G(C))$

$E \leftarrow E' \cup (E \setminus \text{Reach}_G^E(C))$

$G \leftarrow (V_i \cup V_c, E)$

$G \leftarrow G|_{B\text{Reach}_G(\square)}$

\triangleright restrict to nodes with path to \square

return V_i

Algorithm $\text{minUnsatCore}(\varphi)$

Input: unsatisfiable formula φ

Output: minimal unsatisfiable core of φ

build refutation graph $G = (V_i \uplus V_c, E)$ for φ

while \exists unmarked clause in V_i **do**

$C \leftarrow$ unmarked clause in V_i

if $\text{SAT}(\overline{\text{Reach}_G(C)})$ **then**

\triangleright subgraph without C satisfiable?

 mark C

$\triangleright C$ is UC member

else

 build refutation graph $G' = (V'_i \uplus V'_c, E')$ for $\overline{\text{Reach}_G(C)}$

$V_i \leftarrow V_i \setminus \{C\}$ and $V_c \leftarrow V'_c \cup (V_c \setminus \text{Reach}_G(C))$

$E \leftarrow E' \cup (E \setminus \text{Reach}_G^E(C))$

$G \leftarrow (V_i \cup V_c, E)$

$G \leftarrow G|_{B\text{Reach}_G(\square)}$

\triangleright restrict to nodes with path to \square

return V_i

Algorithm $\text{minUnsatCore}(\varphi)$

Input: unsatisfiable formula φ

Output: minimal unsatisfiable core of φ

build refutation graph $G = (V_i \uplus V_c, E)$ for φ

while \exists unmarked clause in V_i **do**

$C \leftarrow$ unmarked clause in V_i

if $\text{SAT}(\overline{\text{Reach}_G(C)})$ **then**

\triangleright subgraph without C satisfiable?

 mark C

$\triangleright C$ is UC member

else

 build refutation graph $G' = (V'_i \uplus V'_c, E')$ for $\overline{\text{Reach}_G(C)}$

$V_i \leftarrow V_i \setminus \{C\}$ and $V_c \leftarrow V'_c \cup (V_c \setminus \text{Reach}_G(C))$

$E \leftarrow E' \cup (E \setminus \text{Reach}_G^E(C))$

$G \leftarrow (V_i \cup V_c, E)$

$G \leftarrow G|_{B\text{Reach}_G(\square)}$

\triangleright restrict to nodes with path to \square

return V_i

Algorithm $\text{minUnsatCore}(\varphi)$

Input: unsatisfiable formula φ

Output: minimal unsatisfiable core of φ

build refutation graph $G = (V_i \uplus V_c, E)$ for φ

while \exists unmarked clause in V_i **do**

$C \leftarrow$ unmarked clause in V_i

if $\text{SAT}(\overline{\text{Reach}_G(C)})$ **then**

▷ subgraph without C satisfiable?

mark C

▷ C is UC member

else

build refutation graph $G' = (V'_i \uplus V'_c, E')$ for $\overline{\text{Reach}_G(C)}$

$V_i \leftarrow V_i \setminus \{C\}$ and $V_c \leftarrow V'_c \cup (V_c \setminus \text{Reach}_G(C))$

$E \leftarrow E' \cup (E \setminus \text{Reach}_G^E(C))$

$G \leftarrow (V_i \cup V_c, E)$

$G \leftarrow G|_{B\text{Reach}_G(\square)}$

▷ restrict to nodes with path to \square

return V_i

Algorithm minUnsatCore(φ)

Input: unsatisfiable formula φ

Output: minimal unsatisfiable core of φ

build refutation graph $G = (V_i \uplus V_c, E)$ for φ

while \exists unmarked clause in V_i **do**

$C \leftarrow$ unmarked clause in V_i

if $\text{SAT}(\overline{\text{Reach}_G(C)})$ **then**

\triangleright subgraph without C satisfiable?

 mark C

$\triangleright C$ is UC member

else

 build refutation graph $G' = (V'_i \uplus V'_c, E')$ for $\overline{\text{Reach}_G(C)}$

$V_i \leftarrow V_i \setminus \{C\}$ and $V_c \leftarrow V'_c \cup (V_c \setminus \text{Reach}_G(C))$

$E \leftarrow E' \cup (E \setminus \text{Reach}_G^E(C))$

$G \leftarrow (V_i \cup V_c, E)$

$G \leftarrow G|_{B\text{Reach}_G(\square)}$

\triangleright restrict to nodes with path to \square

return V_i

Algorithm minUnsatCore(φ)

Input: unsatisfiable formula φ

Output: minimal unsatisfiable core of φ

build refutation graph $G = (V_i \uplus V_c, E)$ for φ

while \exists unmarked clause in V_i **do**

$C \leftarrow$ unmarked clause in V_i

if SAT($\overline{Reach_G(C)}$) **then** ▷ subgraph without C satisfiable?

mark C ▷ C is UC member

else

 build refutation graph $G' = (V'_i \uplus V'_c, E')$ for $\overline{Reach_G(C)}$

$V_i \leftarrow V_i \setminus \{C\}$ and $V_c \leftarrow V'_c \cup (V_c \setminus Reach_G(C))$

$E \leftarrow E' \cup (E \setminus Reach_G^E(C))$

$G \leftarrow (V_i \cup V_c, E)$

$G \leftarrow G|_{BReach_G(\square)}$ ▷ restrict to nodes with path to \square

return V_i

Algorithm $\text{minUnsatCore}(\varphi)$

Input: unsatisfiable formula φ

Output: minimal unsatisfiable core of φ

build refutation graph $G = (V_i \uplus V_c, E)$ for φ

while \exists unmarked clause in V_i **do**

$C \leftarrow$ unmarked clause in V_i

if $\text{SAT}(\overline{\text{Reach}_G(C)})$ **then**

\triangleright subgraph without C satisfiable?

 mark C

$\triangleright C$ is UC member

else

 build refutation graph $G' = (V'_i \uplus V'_c, E')$ for $\overline{\text{Reach}_G(C)}$

$V_i \leftarrow V_i \setminus \{C\}$ and $V_c \leftarrow V'_c \cup (V_c \setminus \text{Reach}_G(C))$

$E \leftarrow E' \cup (E \setminus \text{Reach}_G^E(C))$

$G \leftarrow (V_i \cup V_c, E)$

$G \leftarrow G|_{B\text{Reach}_G(\square)}$

\triangleright restrict to nodes with path to \square

return V_i

Algorithm $\text{minUnsatCore}(\varphi)$

Input: unsatisfiable formula φ

Output: minimal unsatisfiable core of φ

build refutation graph $G = (V_i \uplus V_c, E)$ for φ

while \exists unmarked clause in V_i **do**

$C \leftarrow$ unmarked clause in V_i

if $\text{SAT}(\overline{\text{Reach}_G(C)})$ **then** ▷ subgraph without C satisfiable?

 mark C ▷ C is UC member

else

 build refutation graph $G' = (V'_i \uplus V'_c, E')$ for $\overline{\text{Reach}_G(C)}$

$V_i \leftarrow V_i \setminus \{C\}$ and $V_c \leftarrow V'_c \cup (V_c \setminus \text{Reach}_G(C))$

$E \leftarrow E' \cup (E \setminus \text{Reach}_G^E(C))$

$G \leftarrow (V_i \cup V_c, E)$

$G \leftarrow G|_{B\text{Reach}_G(\square)}$ ▷ restrict to nodes with path to \square

return V_i

Algorithm minUnsatCore(φ)

Input: unsatisfiable formula φ

Output: minimal unsatisfiable core of φ

build refutation graph $G = (V_i \uplus V_c, E)$ for φ

while \exists unmarked clause in V_i **do**

$C \leftarrow$ unmarked clause in V_i

if SAT($\overline{Reach_G(C)}$) **then** ▷ subgraph without C satisfiable?

 mark C ▷ C is UC member

else

 build refutation graph $G' = (V'_i \uplus V'_c, E')$ for $\overline{Reach_G(C)}$

$V_i \leftarrow V_i \setminus \{C\}$ and $V_c \leftarrow V'_c \cup (V_c \setminus Reach_G(C))$

$E \leftarrow E' \cup (E \setminus Reach_G^E(C))$

$G \leftarrow (V_i \cup V_c, E)$

$G \leftarrow G|_{BReach_G(\square)}$ ▷ restrict to nodes with path to \square

return V_i

Algorithm $\text{minUnsatCore}(\varphi)$

Input: unsatisfiable formula φ

Output: minimal unsatisfiable core of φ

build refutation graph $G = (V_i \uplus V_c, E)$ for φ

while \exists unmarked clause in V_i **do**

$C \leftarrow$ unmarked clause in V_i

if $\text{SAT}(\overline{\text{Reach}_G(C)})$ **then** ▷ subgraph without C satisfiable?

 mark C ▷ C is UC member

else

 build refutation graph $G' = (V'_i \uplus V'_c, E')$ for $\overline{\text{Reach}_G(C)}$

$V_i \leftarrow V_i \setminus \{C\}$ and $V_c \leftarrow V'_c \cup (V_c \setminus \text{Reach}_G(C))$

$E \leftarrow E' \cup (E \setminus \text{Reach}_G^E(C))$

$G \leftarrow (V_i \cup V_c, E)$

$G \leftarrow G|_{B\text{Reach}_G(\square)}$ ▷ restrict to nodes with path to \square

return V_i

Algorithm $\text{minUnsatCore}(\varphi)$

Input: unsatisfiable formula φ

Output: minimal unsatisfiable core of φ

build refutation graph $G = (V_i \uplus V_c, E)$ for φ

while \exists unmarked clause in V_i **do**

$C \leftarrow$ unmarked clause in V_i

if $\text{SAT}(\overline{\text{Reach}_G(C)})$ **then** ▷ subgraph without C satisfiable?

 mark C ▷ C is UC member

else

 build refutation graph $G' = (V'_i \uplus V'_c, E')$ for $\overline{\text{Reach}_G(C)}$

$V_i \leftarrow V_i \setminus \{C\}$ and $V_c \leftarrow V'_c \cup (V_c \setminus \text{Reach}_G(C))$

$E \leftarrow E' \cup (E \setminus \text{Reach}_G^E(C))$

$G \leftarrow (V_i \cup V_c, E)$

$G \leftarrow G|_{B\text{Reach}_G(\square)}$ ▷ restrict to nodes with path to \square

return V_i

Algorithm $\text{minUnsatCore}(\varphi)$

Input: unsatisfiable formula φ

Output: minimal unsatisfiable core of φ

build refutation graph $G = (V_i \uplus V_c, E)$ for φ

while \exists unmarked clause in V_i **do**

$C \leftarrow$ unmarked clause in V_i

if $\text{SAT}(\overline{\text{Reach}_G(C)})$ **then**

\triangleright subgraph without C satisfiable?

 mark C

$\triangleright C$ is UC member

else

 build refutation graph $G' = (V'_i \uplus V'_c, E')$ for $\overline{\text{Reach}_G(C)}$

$V_i \leftarrow V_i \setminus \{C\}$ and $V_c \leftarrow V'_c \cup (V_c \setminus \text{Reach}_G(C))$

$E \leftarrow E' \cup (E \setminus \text{Reach}_G^E(C))$

$G \leftarrow (V_i \cup V_c, E)$

$G \leftarrow G|_{B\text{Reach}_G(\square)}$

\triangleright restrict to nodes with path to \square

return V_i

Algorithm minUnsatCore(φ)

Input: unsatisfiable formula φ

Output: minimal unsatisfiable core of φ

build refutation graph $G = (V_i \uplus V_c, E)$ for φ

while \exists unmarked clause in V_i **do**

$C \leftarrow$ unmarked clause in V_i

if SAT($\overline{Reach_G(C)}$) **then**

\triangleright subgraph without C satisfiable?

 mark C

$\triangleright C$ is UC member

else

 build refutation graph $G' = (V'_i \uplus V'_c, E')$ for $\overline{Reach_G(C)}$

$V_i \leftarrow V_i \setminus \{C\}$ and $V_c \leftarrow V'_c \cup (V_c \setminus Reach_G(C))$

$E \leftarrow E' \cup (E \setminus Reach_G^E(C))$

$G \leftarrow (V_i \cup V_c, E)$

$G \leftarrow G|_{BReach_G(\square)}$

\triangleright restrict to nodes with path to \square

return V_i

Algorithm $\text{minUnsatCore}(\varphi)$

Input: unsatisfiable formula φ

Output: minimal unsatisfiable core of φ

build refutation graph $G = (V_i \uplus V_c, E)$ for φ

while \exists unmarked clause in V_i **do**

$C \leftarrow$ unmarked clause in V_i

if $\text{SAT}(\overline{\text{Reach}_G(C)})$ **then** ▷ subgraph without C satisfiable?

 mark C ▷ C is UC member

else

 build refutation graph $G' = (V'_i \uplus V'_c, E')$ for $\overline{\text{Reach}_G(C)}$

$V_i \leftarrow V_i \setminus \{C\}$ and $V_c \leftarrow V'_c \cup (V_c \setminus \text{Reach}_G(C))$

$E \leftarrow E' \cup (E \setminus \text{Reach}_G^E(C))$

$G \leftarrow (V_i \cup V_c, E)$


$G \leftarrow G|_{B\text{Reach}_G(\square)}$ ▷ restrict to nodes with path to \square

return V_i

Theorem

if φ unsatisfiable then $\text{minUnsatCore}(\varphi)$ is minimal unsatisfiable core of φ


Example

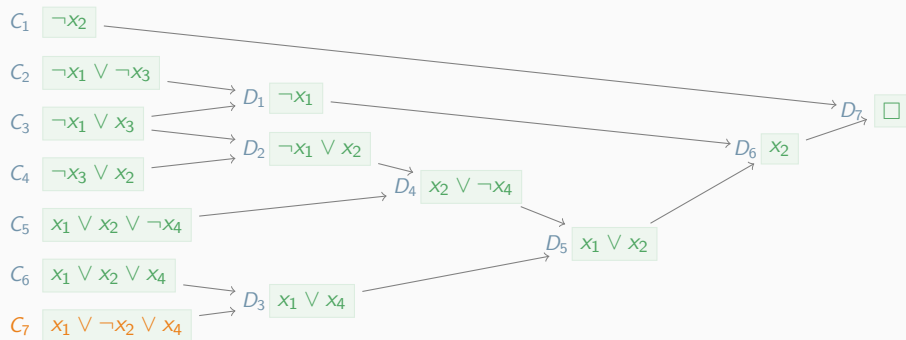

$\text{minUnsatCore}(\varphi)$

- pick C_7


Example

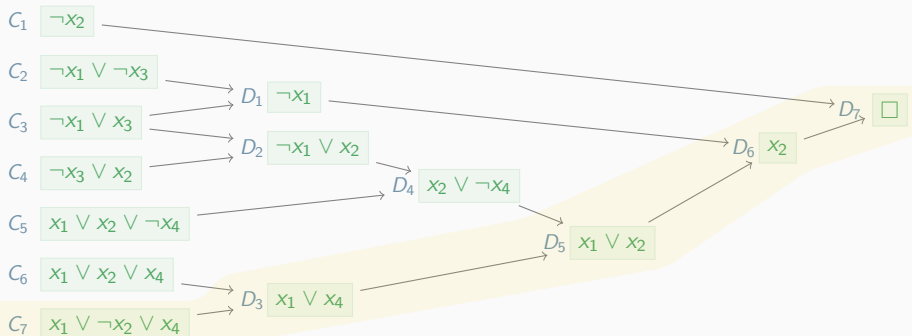

$\text{minUnsatCore}(\varphi)$

- ▶ pick C_7
- ▶ $\text{Reach}_G(C_7) = \{C_7, D_3, D_5, D_6, D_7\}$

Example

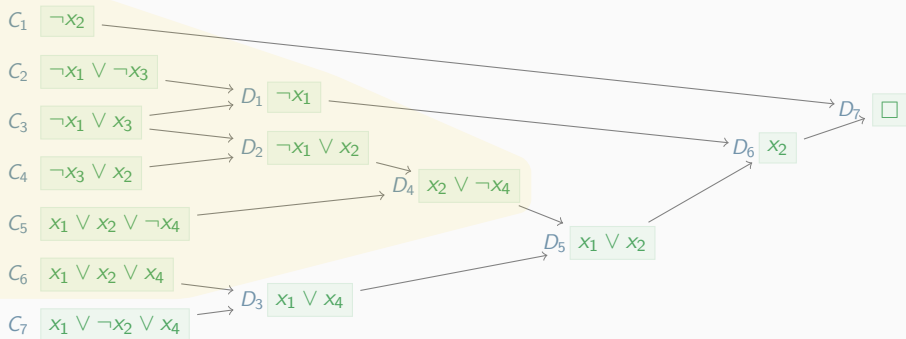

$\text{minUnsatCore}(\varphi)$

- ▶ pick C_7
- ▶ $\text{Reach}_G(C_7) = \{C_7, D_3, D_5, D_6, D_7\}$, so $\overline{\text{Re}(C_7, G)} = \{C_1, \dots, C_6, D_1, D_2, D_4\}$

Example

$$C_1 \quad \neg x_2$$

$$C_2 \quad \neg x_1 \vee \neg x_3$$

$$C_3 \quad \neg x_1 \vee x_3$$

$$C_4 \quad \neg x_3 \vee x_2$$

$$C_5 \quad x_1 \vee x_2 \vee \neg x_4$$

$$C_6 \quad x_1 \vee x_2 \vee x_4$$

$$D_1 \quad \neg x_1$$


$$D_2 \quad \neg x_1 \vee x_2$$

$$D_4 \quad x_2 \vee \neg x_4$$

minUnsatCore(φ)

- ▶ pick C_7
- ▶ $Reach_G(C_7) = \{C_7, D_3, D_5, D_6, D_7\}$, so $\overline{Reach_G(C_7)} = \{C_1, \dots, C_6, D_1, D_2, D_4\}$
- ▶ check SAT($\overline{Reach_G(C_7)}$)


Example

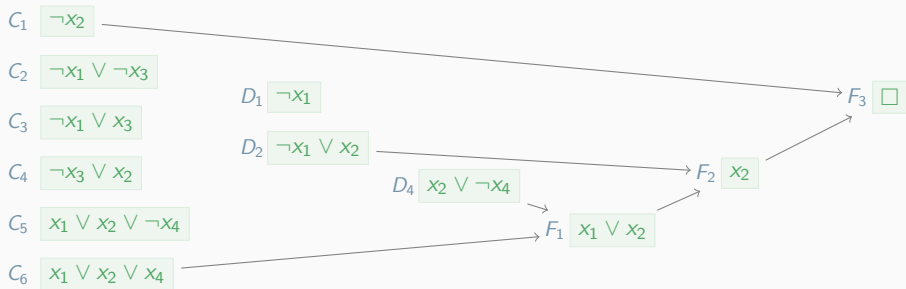

minUnsatCore(φ)

- ▶ pick C_7
- ▶ $Reach_G(C_7) = \{C_7, D_3, D_5, D_6, D_7\}$, so $\overline{Re(C_7, G)} = \{C_1, \dots, C_6, D_1, D_2, D_4\}$
- ▶ check $SAT(\overline{Re(C_7, G)})$
- ▶ unsatisfiable: get new resolution graph G_7 for $\varphi \cup \{D_1, D_2, D_4\}$


Example

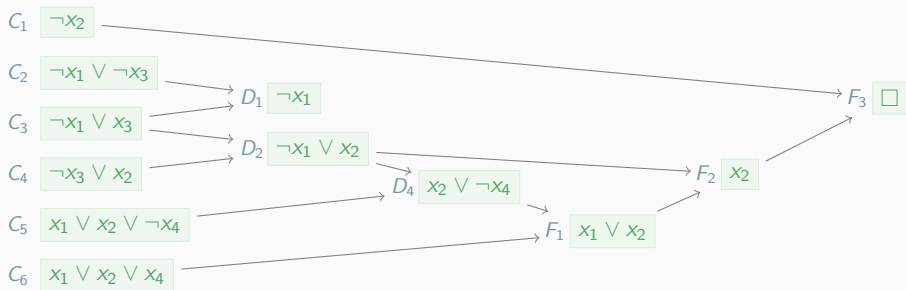

minUnsatCore(φ)

- ▶ pick C_7
- ▶ $Reach_G(C_7) = \{C_7, D_3, D_5, D_6, D_7\}$, so $\overline{Re(C_7, G)} = \{C_1, \dots, C_6, D_1, D_2, D_4\}$
- ▶ check $SAT(\overline{Reach_G(C_7)})$
- ▶ unsatisfiable: get new resolution graph G_7 for $\varphi \cup \{D_1, D_2, D_4\}$
- ▶ construct resolution graph G' for φ by adding edges from G to G_7


Example

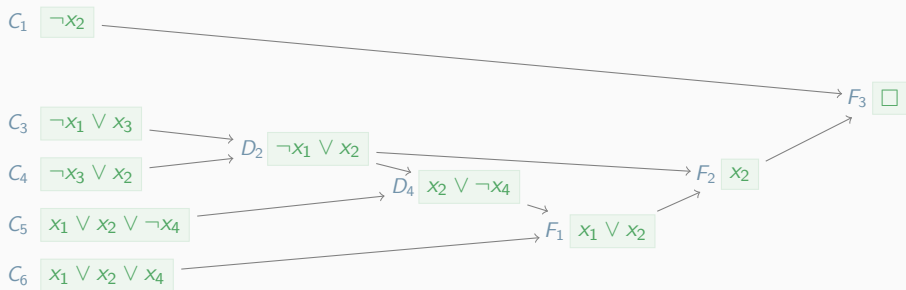

$\text{minUnsatCore}(\varphi)$

- ▶ pick C_7
- ▶ $\text{Reach}_G(C_7) = \{C_7, D_3, D_5, D_6, D_7\}$, so $\overline{\text{Re}(C_7, G)} = \{C_1, \dots, C_6, D_1, D_2, D_4\}$
- ▶ check $\text{SAT}(\overline{\text{Reach}_G(C_7)})$
- ▶ unsatisfiable: get new resolution graph G_7 for $\varphi \cup \{D_1, D_2, D_4\}$
- ▶ construct resolution graph G' for φ by adding edges from G to G_7
- ▶ set G to G' restricted to $\text{BReach}_{G'}(\square)$


Example

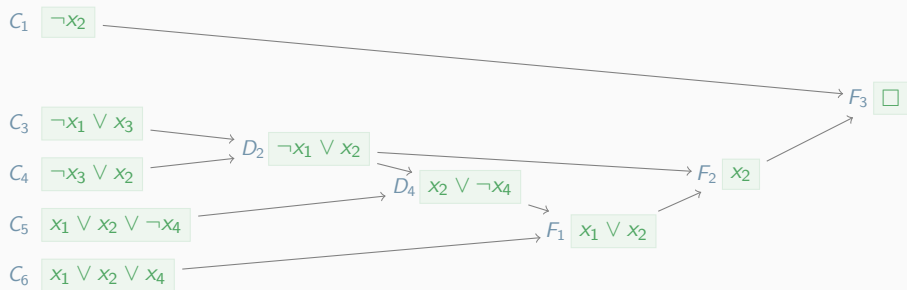

minUnsatCore(φ)

- ▶ pick C_7
- ▶ $Reach_G(C_7) = \{C_7, D_3, D_5, D_6, D_7\}$, so $\overline{Re(C_7, G)} = \{C_1, \dots, C_6, D_1, D_2, D_4\}$
- ▶ check $SAT(\overline{Reach_G(C_7)})$
- ▶ unsatisfiable: get new resolution graph G_7 for $\varphi \cup \{D_1, D_2, D_4\}$
- ▶ construct resolution graph G' for φ by adding edges from G to G_7
- ▶ set G to G' restricted to $BReach_{G'}(\square)$
- ▶ after 5 more loop iterations: return $\{C_1, C_3, \dots, C_6\}$

Example

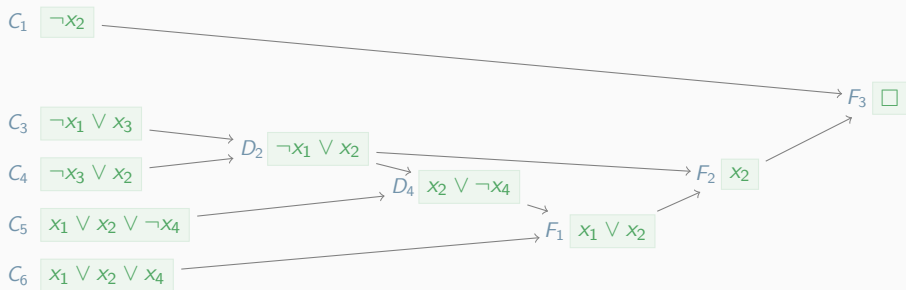

minUnsatCore(φ)

- ▶ pick C_7
- ▶ $Reach_G(C_7) = \{C_7, D_3, D_5, D_6, D_7\}$, so $\overline{Reach_G(C_7)} = \{C_1, \dots, C_6, D_1, D_2, D_4\}$
- ▶ check $SAT(\overline{Reach_G(C_7)})$
- ▶ unsatisfiable: get new resolution graph G_7 for $\varphi \cup \{D_1, D_2, D_4\}$
- ▶ construct resolution graph G' for φ by adding edges from G to G_7
- ▶ set G to G' restricted to $BReach_{G'}(\square)$
- ▶ after 5 more loop iterations: return $\{C_1, C_3, \dots, C_6\}$

re-use relevant resolvents:
fewer steps to \square

Bounds for Maximum Satisfiability

Definition

if $\varphi = C_1 \wedge \cdots \wedge C_m$ is CNF formula then **blocked formula**

$$\varphi_B = (C_1 \vee b_1) \wedge \cdots \wedge (C_m \vee b_m)$$

for fresh variables b_1, \dots, b_m

Bounds for Maximum Satisfiability

Definition

if $\varphi = C_1 \wedge \cdots \wedge C_m$ is CNF formula then blocked formula

$$\varphi_B = (C_1 \vee b_1) \wedge \cdots \wedge (C_m \vee b_m)$$

for fresh variables b_1, \dots, b_m

Lemma (Lower Bound)

Let v satisfy φ_B and $B_T = \{b_i \mid v(b_i) = T\}$. Then $\text{maxSAT}(\varphi) \geq |\varphi| - |B_T|$

Bounds for Maximum Satisfiability

Definition

if $\varphi = C_1 \wedge \dots \wedge C_m$ is CNF formula then blocked formula

$$\varphi_B = (C_1 \vee b_1) \wedge \dots \wedge (C_m \vee b_m)$$

for fresh variables b_1, \dots, b_m

Lemma (Lower Bound)

Let v satisfy φ_B and $B_T = \{b_i \mid v(b_i) = T\}$. Then $\text{maxSAT}(\varphi) \geq |\varphi| - |B_T|$

Lemma (Upper Bound)

If φ contains k disjoint unsatisfiable cores then $\text{maxSAT}(\varphi) \leq |\varphi| - k$

Bounds for Maximum Satisfiability

Definition

if $\varphi = C_1 \wedge \dots \wedge C_m$ is CNF formula then blocked formula

$$\varphi_B = (C_1 \vee b_1) \wedge \dots \wedge (C_m \vee b_m)$$

for fresh variables b_1, \dots, b_m

Lemma (Lower Bound)

Let v satisfy φ_B and $B_T = \{b_i \mid v(b_i) = T\}$. Then $\text{maxSAT}(\varphi) \geq |\varphi| - |B_T|$

Lemma (Upper Bound)

If φ contains k disjoint unsatisfiable cores then $\text{maxSAT}(\varphi) \leq |\varphi| - k$

Example (Upper Bound)

$$\begin{array}{ccccccc}
 \neg x_3 \vee \neg x_4 & \neg x_3 \vee x_4 & & x_7 & & & \\
 & x_3 & & \neg x_7 \vee x_8 & \neg x_1 \vee x_8 & & x_4 \vee x_5 \quad x_1 \vee \neg x_5 \vee x_6 \\
 & & & & & & x_5 \vee \neg x_6 \\
 x_1 & \neg x_1 \vee \neg x_3 & \neg x_7 \vee \neg x_8 \vee x_6 & \neg x_9 \vee x_2 & & & \\
 \neg x_1 \vee \neg x_2 & \neg x_1 \vee x_2 & \neg x_7 \vee \neg x_8 \vee \neg x_6 & & & & \neg x_4 \vee x_5 \quad \neg x_1 \vee \neg x_5
 \end{array}$$

Bounds for Maximum Satisfiability

Definition

if $\varphi = C_1 \wedge \dots \wedge C_m$ is CNF formula then blocked formula

$$\varphi_B = (C_1 \vee b_1) \wedge \dots \wedge (C_m \vee b_m)$$

for fresh variables b_1, \dots, b_m


Lemma (Lower Bound)

Let v satisfy φ_B and $B_T = \{b_i \mid v(b_i) = T\}$. Then $\text{maxSAT}(\varphi) \geq |\varphi| - |B_T|$

Lemma (Upper Bound)

If φ contains k disjoint unsatisfiable cores then $\text{maxSAT}(\varphi) \leq |\varphi| - k$

Example (Upper Bound)

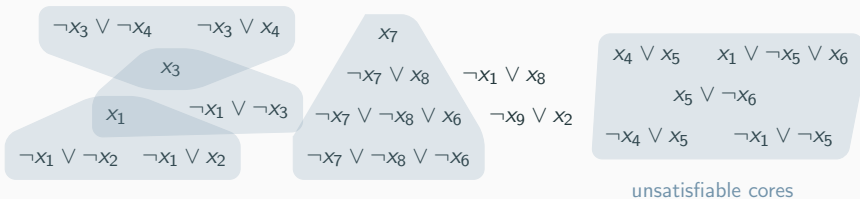

Bounds for Maximum Satisfiability

Definition

if $\varphi = C_1 \wedge \dots \wedge C_m$ is CNF formula then blocked formula

$$\varphi_B = (C_1 \vee b_1) \wedge \dots \wedge (C_m \vee b_m)$$

for fresh variables b_1, \dots, b_m


Lemma (Lower Bound)

Let v satisfy φ_B and $B_T = \{b_i \mid v(b_i) = T\}$. Then $\text{maxSAT}(\varphi) \geq |\varphi| - |B_T|$

Lemma (Upper Bound)

If φ contains k disjoint unsatisfiable cores then $\text{maxSAT}(\varphi) \leq |\varphi| - k$

Example (Upper Bound)

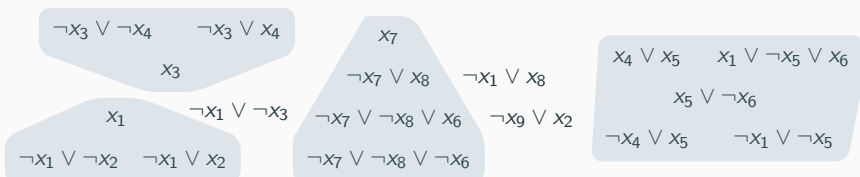

4 disjoint unsatisfiable cores

Bounds for Maximum Satisfiability

Definition

if $\varphi = C_1 \wedge \dots \wedge C_m$ is CNF formula then blocked formula

$$\varphi_B = (C_1 \vee b_1) \wedge \dots \wedge (C_m \vee b_m)$$

for fresh variables b_1, \dots, b_m


Lemma (Lower Bound)

Let v satisfy φ_B and $B_T = \{b_i \mid v(b_i) = T\}$. Then $\text{maxSAT}(\varphi) \geq |\varphi| - |B_T|$

Lemma (Upper Bound)

If φ contains k disjoint unsatisfiable cores then $\text{maxSAT}(\varphi) \leq |\varphi| - k$

Example (Upper Bound)

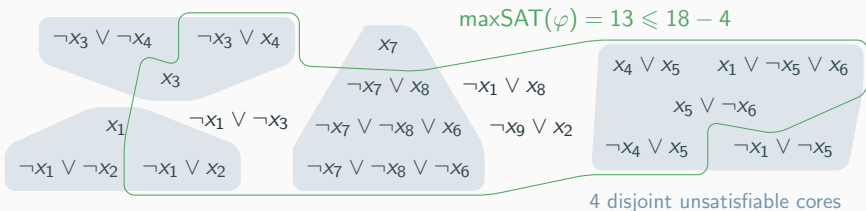

Algorithm by Fu and Malik

Definition (Partial minUNSAT)

$\text{pminUNSAT}(\chi, \varphi)$ is minimal $|\psi|$ such that $\psi \subseteq \varphi$ and $\chi \wedge \bigwedge_{C \in \psi} \neg C$ satisfiable

Lemma

$$|\varphi| = |\text{pminUNSAT}(\chi, \varphi)| + |\text{pmaxSAT}(\chi, \varphi)|$$

Definition (Partial minUNSAT)

$\text{pminUNSAT}(\chi, \varphi)$ is minimal $|\psi|$ such that $\psi \subseteq \varphi$ and $\chi \wedge \bigwedge_{C \in \psi} \neg C$ satisfiable

Lemma

$$|\varphi| = |\text{pminUNSAT}(\chi, \varphi)| + |\text{pmaxSAT}(\chi, \varphi)|$$

Idea

- ▶ maximal satisfying valuation falsifies at least one clause in unsatisfiable core

Definition (Partial minUNSAT)

$\text{pminUNSAT}(\chi, \varphi)$ is minimal $|\psi|$ such that $\psi \subseteq \varphi$ and $\chi \wedge \bigwedge_{C \in \psi} \neg C$ satisfiable

Lemma

$$|\varphi| = |\text{pminUNSAT}(\chi, \varphi)| + |\text{pmaxSAT}(\chi, \varphi)|$$

Idea

- ▶ maximal satisfying valuation falsifies at least one clause in unsatisfiable core
- ▶ repeatedly call SAT solver on relaxed formula excluding unsatisfiable core until resulting formula is satisfiable

Definition (Partial minUNSAT)

$\text{pminUNSAT}(\chi, \varphi)$ is minimal $|\psi|$ such that $\psi \subseteq \varphi$ and $\chi \wedge \bigwedge_{C \in \psi} \neg C$ satisfiable

Lemma

$$|\varphi| = |\text{pminUNSAT}(\chi, \varphi)| + |\text{pmaxSAT}(\chi, \varphi)|$$

Idea

- ▶ maximal satisfying valuation falsifies at least one clause in unsatisfiable core
- ▶ repeatedly call SAT solver on relaxed formula excluding unsatisfiable core until resulting formula is satisfiable
- ▶ returns pminUNSAT for hard clauses χ , soft clauses φ

Algorithm FuMalik(χ, φ)

Input: clause set φ and satisfiable clause set χ

Output: minUNSAT(χ, φ)

$cost \leftarrow 0$

while \neg SAT($\chi \cup \varphi$) **do**

$UC \leftarrow$ unsatCore($\chi \cup \varphi$)

$B \leftarrow \emptyset$

for $C \in UC \cap \varphi$ **do**

$b \leftarrow$ new blocking variable

$\varphi \leftarrow \varphi \setminus \{C\} \cup \{C \vee b\}$

$B \leftarrow B \cup \{b\}$

$\chi \leftarrow \chi \cup \text{CNF}(\sum_{b \in B} b = 1)$

$cost \leftarrow cost + 1$

return $cost$

▷ loop over soft clauses in core

▷ cardinality constraint is hard

Algorithm FuMalik(χ, φ)

Input: clause set φ and satisfiable clause set χ

Output: $\text{minUNSAT}(\chi, \varphi)$

$cost \leftarrow 0$

while $\neg\text{SAT}(\chi \cup \varphi)$ **do**

$UC \leftarrow \text{unsatCore}(\chi \cup \varphi)$

$B \leftarrow \emptyset$

for $C \in UC \cap \varphi$ **do**

$b \leftarrow$ new blocking variable

$\varphi \leftarrow \varphi \setminus \{C\} \cup \{C \vee b\}$

$B \leftarrow B \cup \{b\}$

$\chi \leftarrow \chi \cup \text{CNF}(\sum_{b \in B} b = 1)$

$cost \leftarrow cost + 1$

return $cost$

▷ loop over soft clauses in core

▷ cardinality constraint is hard

Algorithm FuMalik(χ, φ)

Input: clause set φ and satisfiable clause set χ

Output: minUNSAT(χ, φ)

cost \leftarrow 0

while \neg SAT($\chi \cup \varphi$) **do**

$UC \leftarrow$ unsatCore($\chi \cup \varphi$)

$B \leftarrow \emptyset$

for $C \in UC \cap \varphi$ **do**

$b \leftarrow$ new blocking variable

$\varphi \leftarrow \varphi \setminus \{C\} \cup \{C \vee b\}$

$B \leftarrow B \cup \{b\}$

$\chi \leftarrow \chi \cup \text{CNF}(\sum_{b \in B} b = 1)$

cost \leftarrow *cost* + 1

return *cost*

▷ loop over soft clauses in core

▷ cardinality constraint is hard

Algorithm FuMalik(χ, φ)

Input: clause set φ and satisfiable clause set χ

Output: minUNSAT(χ, φ)

$cost \leftarrow 0$

while $\neg SAT(\chi \cup \varphi)$ **do**

$UC \leftarrow \text{unsatCore}(\chi \cup \varphi)$

$B \leftarrow \emptyset$

for $C \in UC \cap \varphi$ **do**

$b \leftarrow$ new blocking variable

$\varphi \leftarrow \varphi \setminus \{C\} \cup \{C \vee b\}$

$B \leftarrow B \cup \{b\}$

$\chi \leftarrow \chi \cup \text{CNF}(\sum_{b \in B} b = 1)$

$cost \leftarrow cost + 1$

return $cost$

▷ loop over soft clauses in core

▷ cardinality constraint is hard

Algorithm FuMalik(χ, φ)

Input: clause set φ and satisfiable clause set χ

Output: minUNSAT(χ, φ)

$cost \leftarrow 0$

while \neg SAT($\chi \cup \varphi$) **do**

$UC \leftarrow$ **unsatCore**($\chi \cup \varphi$)

$B \leftarrow \emptyset$

for $C \in UC \cap \varphi$ **do**

$b \leftarrow$ new blocking variable

$\varphi \leftarrow \varphi \setminus \{C\} \cup \{C \vee b\}$

$B \leftarrow B \cup \{b\}$

$\chi \leftarrow \chi \cup \text{CNF}(\sum_{b \in B} b = 1)$

$cost \leftarrow cost + 1$

return $cost$

▷ loop over soft clauses in core

▷ cardinality constraint is hard

Algorithm FuMalik(χ, φ)

Input: clause set φ and satisfiable clause set χ

Output: minUNSAT(χ, φ)

$cost \leftarrow 0$

while \neg SAT($\chi \cup \varphi$) **do**

$UC \leftarrow$ unsatCore($\chi \cup \varphi$)

$B \leftarrow \emptyset$

for $C \in UC \cap \varphi$ **do**

$b \leftarrow$ new blocking variable

$\varphi \leftarrow \varphi \setminus \{C\} \cup \{C \vee b\}$

$B \leftarrow B \cup \{b\}$

$\chi \leftarrow \chi \cup \text{CNF}(\sum_{b \in B} b = 1)$

$cost \leftarrow cost + 1$

return $cost$

▷ loop over soft clauses in core

▷ cardinality constraint is hard

Algorithm FuMalik(χ, φ)

Input: clause set φ and satisfiable clause set χ

Output: minUNSAT(χ, φ)

$cost \leftarrow 0$

while \neg SAT($\chi \cup \varphi$) **do**

$UC \leftarrow$ unsatCore($\chi \cup \varphi$)

$B \leftarrow \emptyset$

for $C \in UC \cap \varphi$ **do**

$b \leftarrow$ new blocking variable

$\varphi \leftarrow \varphi \setminus \{C\} \cup \{C \vee b\}$

$B \leftarrow B \cup \{b\}$

$\chi \leftarrow \chi \cup \text{CNF}(\sum_{b \in B} b = 1)$

$cost \leftarrow cost + 1$

return $cost$

▷ loop over soft clauses in core

▷ cardinality constraint is hard

Algorithm FuMalik(χ, φ)

Input: clause set φ and satisfiable clause set χ

Output: minUNSAT(χ, φ)

$cost \leftarrow 0$

while \neg SAT($\chi \cup \varphi$) **do**

$UC \leftarrow$ unsatCore($\chi \cup \varphi$)

$B \leftarrow \emptyset$

for $C \in UC \cap \varphi$ **do**

$b \leftarrow$ new blocking variable

$\varphi \leftarrow \varphi \setminus \{C\} \cup \{C \vee b\}$

$B \leftarrow B \cup \{b\}$

$\chi \leftarrow \chi \cup \text{CNF}(\sum_{b \in B} b = 1)$

$cost \leftarrow cost + 1$

return $cost$

▷ loop over soft clauses in core

▷ cardinality constraint is hard

Algorithm FuMalik(χ, φ)

Input: clause set φ and satisfiable clause set χ

Output: minUNSAT(χ, φ)

$cost \leftarrow 0$

while \neg SAT($\chi \cup \varphi$) **do**

$UC \leftarrow \text{unsatCore}(\chi \cup \varphi)$

$B \leftarrow \emptyset$

for $C \in UC \cap \varphi$ **do**

$b \leftarrow$ new blocking variable

$\varphi \leftarrow \varphi \setminus \{C\} \cup \{C \vee b\}$

$B \leftarrow B \cup \{b\}$

$\chi \leftarrow \chi \cup \text{CNF}(\sum_{b \in B} b = 1)$

$cost \leftarrow cost + 1$

return $cost$

▷ loop over soft clauses in core

▷ cardinality constraint is hard

Algorithm FuMalik(χ, φ)

Input: clause set φ and satisfiable clause set χ

Output: minUNSAT(χ, φ)

$cost \leftarrow 0$

while \neg SAT($\chi \cup \varphi$) **do**

$UC \leftarrow$ unsatCore($\chi \cup \varphi$)

$B \leftarrow \emptyset$

for $C \in UC \cap \varphi$ **do**

$b \leftarrow$ new blocking variable

$\varphi \leftarrow \varphi \setminus \{C\} \cup \{C \vee b\}$

$B \leftarrow B \cup \{b\}$

$\chi \leftarrow \chi \cup \text{CNF}(\sum_{b \in B} b = 1)$

$cost \leftarrow cost + 1$

return $cost$

▷ loop over soft clauses in core

▷ cardinality constraint is hard

Algorithm FuMalik(χ, φ)

Input: clause set φ and satisfiable clause set χ

Output: minUNSAT(χ, φ)

$cost \leftarrow 0$

while \neg SAT($\chi \cup \varphi$) **do**

$UC \leftarrow$ unsatCore($\chi \cup \varphi$)

$B \leftarrow \emptyset$

for $C \in UC \cap \varphi$ **do**

$b \leftarrow$ new blocking variable

$\varphi \leftarrow \varphi \setminus \{C\} \cup \{C \vee b\}$

$B \leftarrow B \cup \{b\}$

$\chi \leftarrow \chi \cup \text{CNF}(\sum_{b \in B} b = 1)$

$cost \leftarrow cost + 1$

return $cost$

▷ loop over soft clauses in core

▷ cardinality constraint is hard

Algorithm FuMalik(χ, φ)

Input: clause set φ and satisfiable clause set χ

Output: minUNSAT(χ, φ)

$cost \leftarrow 0$

while \neg SAT($\chi \cup \varphi$) **do**

$UC \leftarrow$ unsatCore($\chi \cup \varphi$)

$B \leftarrow \emptyset$

for $C \in UC \cap \varphi$ **do**

$b \leftarrow$ new blocking variable

$\varphi \leftarrow \varphi \setminus \{C\} \cup \{C \vee b\}$

$B \leftarrow B \cup \{b\}$

$\chi \leftarrow \chi \cup \text{CNF}(\sum_{b \in B} b = 1)$

$cost \leftarrow cost + 1$

return $cost$

▷ loop over soft clauses in core

▷ cardinality constraint is hard

Algorithm FuMalik(χ, φ)

Input: clause set φ and satisfiable clause set χ

Output: minUNSAT(χ, φ)

$cost \leftarrow 0$

while \neg SAT($\chi \cup \varphi$) **do**

$UC \leftarrow$ unsatCore($\chi \cup \varphi$)

$B \leftarrow \emptyset$

for $C \in UC \cap \varphi$ **do**

$b \leftarrow$ new blocking variable

$\varphi \leftarrow \varphi \setminus \{C\} \cup \{C \vee b\}$

$B \leftarrow B \cup \{b\}$

$\chi \leftarrow \chi \cup \text{CNF}(\sum_{b \in B} b = 1)$

$cost \leftarrow cost + 1$

▷ loop over soft clauses in core

▷ cardinality constraint is hard

return $cost$

Algorithm FuMalik(χ, φ)

Input: clause set φ and satisfiable clause set χ

Output: minUNSAT(χ, φ)

$cost \leftarrow 0$

while \neg SAT($\chi \cup \varphi$) **do**

$UC \leftarrow$ unsatCore($\chi \cup \varphi$)

$B \leftarrow \emptyset$

for $C \in UC \cap \varphi$ **do**

$b \leftarrow$ new blocking variable

$\varphi \leftarrow \varphi \setminus \{C\} \cup \{C \vee b\}$

$B \leftarrow B \cup \{b\}$

$\chi \leftarrow \chi \cup \text{CNF}(\sum_{b \in B} b = 1)$

$cost \leftarrow cost + 1$

return $cost$

▷ loop over soft clauses in core

▷ cardinality constraint is hard

Theorem

$$\text{FuMalik}(\chi, \varphi) = \text{pminUNSAT}(\chi, \varphi)$$

Example

$$\chi: \quad \neg x_1 \vee x_3$$

$$\varphi: \quad \neg x_1 \vee \neg x_2$$

$$\neg x_3 \vee x_4$$

$$\neg x_4 \vee x_5$$

$$\neg x_7 \vee x_8$$

$$\neg x_7 \vee x_2$$

$$\neg x_1 \vee x_2$$

$$x_3$$

$$x_1 \vee \neg x_5 \vee x_6$$

$$\neg x_7 \vee \neg x_8 \vee x_6$$

$$x_7 \vee x_2$$

$$\neg x_1 \vee x_7$$

$$\neg x_3 \vee \neg x_4$$

$$x_5 \vee \neg x_6$$

$$\neg x_7 \vee \neg x_8 \vee \neg x_6$$

$$x_1 \vee \neg x_2$$

$$x_1$$

$$x_4 \vee x_5$$

$$x_7$$

$$\neg x_1 \vee \neg x_3$$

Example

χ :	$\neg x_1 \vee x_3$	$\neg x_7 \vee x_2$	$x_7 \vee x_2$	$x_1 \vee \neg x_2$
φ :	$\neg x_1 \vee \neg x_2$	$\neg x_1 \vee x_2$	$\neg x_1 \vee x_7$	x_1
	$\neg x_3 \vee x_4$	x_3	$\neg x_3 \vee \neg x_4$	$x_4 \vee x_5$
	$\neg x_4 \vee x_5$	$x_1 \vee \neg x_5 \vee x_6$	$x_5 \vee \neg x_6$	x_7
	$\neg x_7 \vee x_8$	$\neg x_7 \vee \neg x_8 \vee x_6$	$\neg x_7 \vee \neg x_8 \vee \neg x_6$	$\neg x_1 \vee \neg x_3$

- unsatisfiable core: $\neg x_1 \vee \neg x_2$, $\neg x_1 \vee x_2$, x_1

Example

χ :	$\neg x_1 \vee x_3$	$\neg x_7 \vee x_2$	$x_7 \vee x_2$	$x_1 \vee \neg x_2$
φ :	$\neg x_1 \vee \neg x_2 \vee b_1$	$\neg x_1 \vee x_2 \vee b_2$	$\neg x_1 \vee x_7$	$x_1 \vee b_3$
	$\neg x_3 \vee x_4$	x_3	$\neg x_3 \vee \neg x_4$	$x_4 \vee x_5$
	$\neg x_4 \vee x_5$	$x_1 \vee \neg x_5 \vee x_6$	$x_5 \vee \neg x_6$	x_7
	$\neg x_7 \vee x_8$	$\neg x_7 \vee \neg x_8 \vee x_6$	$\neg x_7 \vee \neg x_8 \vee \neg x_6$	$\neg x_1 \vee \neg x_3$

- unsatisfiable core: $\neg x_1 \vee \neg x_2, \neg x_1 \vee x_2, x_1$

$$\chi = \chi \cup \text{CNF}(b_1 + b_2 + b_3 = 1)$$

$$\text{cost} = 1$$

Example

χ :	$\neg x_1 \vee x_3$	$\neg x_7 \vee x_2$	$x_7 \vee x_2$	$x_1 \vee \neg x_2$
φ :	$\neg x_1 \vee \neg x_2 \vee b_1$	$\neg x_1 \vee x_2 \vee b_2$	$\neg x_1 \vee x_7$	$x_1 \vee b_3$
	$\neg x_3 \vee x_4$	x_3	$\neg x_3 \vee \neg x_4$	$x_4 \vee x_5$
	$\neg x_4 \vee x_5$	$x_1 \vee \neg x_5 \vee x_6$	$x_5 \vee \neg x_6$	x_7
	$\neg x_7 \vee x_8$	$\neg x_7 \vee \neg x_8 \vee x_6$	$\neg x_7 \vee \neg x_8 \vee \neg x_6$	$\neg x_1 \vee \neg x_3$

- ▶ unsatisfiable core: $\neg x_1 \vee \neg x_2, \neg x_1 \vee x_2, x_1$
 $\chi = \chi \cup \text{CNF}(b_1 + b_2 + b_3 = 1)$
 $\text{cost} = 1$
- ▶ unsatisfiable core: $\neg x_3 \vee x_4, x_3, \neg x_3 \vee \neg x_4$

Example

χ :	$\neg x_1 \vee x_3$	$\neg x_7 \vee x_2$	$x_7 \vee x_2$	$x_1 \vee \neg x_2$
φ :	$\neg x_1 \vee \neg x_2 \vee b_1$	$\neg x_1 \vee x_2 \vee b_2$	$\neg x_1 \vee x_7$	$x_1 \vee b_3$
	$\neg x_3 \vee x_4 \vee c_1$	$x_3 \vee c_2$	$\neg x_3 \vee \neg x_4 \vee c_3$	$x_4 \vee x_5$
	$\neg x_4 \vee x_5$	$x_1 \vee \neg x_5 \vee x_6$	$x_5 \vee \neg x_6$	x_7
	$\neg x_7 \vee x_8$	$\neg x_7 \vee \neg x_8 \vee x_6$	$\neg x_7 \vee \neg x_8 \vee \neg x_6$	$\neg x_1 \vee \neg x_3$

- ▶ unsatisfiable core: $\neg x_1 \vee \neg x_2, \neg x_1 \vee x_2, x_1$
 $\chi = \chi \cup \text{CNF}(b_1 + b_2 + b_3 = 1)$
 $\text{cost} = 1$
- ▶ unsatisfiable core: $\neg x_3 \vee x_4, x_3, \neg x_3 \vee \neg x_4$
 $\chi = \chi \cup \text{CNF}(c_1 + c_2 + c_3 = 1)$
 $\text{cost} = 2$

Example

χ :	$\neg x_1 \vee x_3$	$\neg x_7 \vee x_2$	$x_7 \vee x_2$	$x_1 \vee \neg x_2$
φ :	$\neg x_1 \vee \neg x_2 \vee b_1$	$\neg x_1 \vee x_2 \vee b_2$	$\neg x_1 \vee x_7$	$x_1 \vee b_3$
	$\neg x_3 \vee x_4 \vee c_1$	$x_3 \vee c_2$	$\neg x_3 \vee \neg x_4 \vee c_3$	$x_4 \vee x_5$
	$\neg x_4 \vee x_5$	$x_1 \vee \neg x_5 \vee x_6$	$x_5 \vee \neg x_6$	x_7
	$\neg x_7 \vee x_8$	$\neg x_7 \vee \neg x_8 \vee x_6$	$\neg x_7 \vee \neg x_8 \vee \neg x_6$	$\neg x_1 \vee \neg x_3$

- ▶ unsatisfiable core: $\neg x_1 \vee \neg x_2, \neg x_1 \vee x_2, x_1$
 $\chi = \chi \cup \text{CNF}(b_1 + b_2 + b_3 = 1)$
 $\text{cost} = 1$
- ▶ unsatisfiable core: $\neg x_3 \vee x_4, x_3, \neg x_3 \vee \neg x_4$
 $\chi = \chi \cup \text{CNF}(c_1 + c_2 + c_3 = 1)$
 $\text{cost} = 2$
- ▶ unsatisfiable core: $x_7, \neg x_7 \vee x_8, \neg x_7 \vee \neg x_8 \vee x_6, \neg x_7 \vee \neg x_8 \vee \neg x_6$

Example

$\chi:$	$\neg x_1 \vee x_3$	$\neg x_7 \vee x_2$	$x_7 \vee x_2$	$x_1 \vee \neg x_2$
$\varphi:$	$\neg x_1 \vee \neg x_2 \vee b_1$	$\neg x_1 \vee x_2 \vee b_2$	$\neg x_1 \vee x_7$	$x_1 \vee b_3$
	$\neg x_3 \vee x_4 \vee c_1$	$x_3 \vee c_2$	$\neg x_3 \vee \neg x_4 \vee c_3$	$x_4 \vee x_5$
	$\neg x_4 \vee x_5$	$x_1 \vee \neg x_5 \vee x_6$	$x_5 \vee \neg x_6$	$x_7 \vee d_1$
	$\neg x_7 \vee x_8 \vee d_2$	$\neg x_7 \vee \neg x_8 \vee x_6 \vee d_3$	$\neg x_7 \vee \neg x_8 \vee \neg x_6 \vee d_4$	$\neg x_1 \vee \neg x_3$

- ▶ unsatisfiable core: $\neg x_1 \vee \neg x_2, \neg x_1 \vee x_2, x_1$
 $\chi = \chi \cup \text{CNF}(b_1 + b_2 + b_3 = 1)$
 $\text{cost} = 1$
- ▶ unsatisfiable core: $\neg x_3 \vee x_4, x_3, \neg x_3 \vee \neg x_4$
 $\chi = \chi \cup \text{CNF}(c_1 + c_2 + c_3 = 1)$
 $\text{cost} = 2$
- ▶ unsatisfiable core: $x_7, \neg x_7 \vee x_8, \neg x_7 \vee \neg x_8 \vee x_6, \neg x_7 \vee \neg x_8 \vee \neg x_6$
 $\chi = \chi \cup \text{CNF}(d_1 + d_2 + d_3 + d_4 = 1)$
 $\text{cost} = 3$

Example

χ :	$\neg x_1 \vee x_3$	$\neg x_7 \vee x_2$	$x_7 \vee x_2$	$x_1 \vee \neg x_2$
φ :	$\neg x_1 \vee \neg x_2 \vee b_1$	$\neg x_1 \vee x_2 \vee b_2$	$\neg x_1 \vee x_7$	$x_1 \vee b_3$
	$\neg x_3 \vee x_4 \vee c_1$	$x_3 \vee c_2$	$\neg x_3 \vee \neg x_4 \vee c_3$	$x_4 \vee x_5$
	$\neg x_4 \vee x_5$	$x_1 \vee \neg x_5 \vee x_6$	$x_5 \vee \neg x_6$	$x_7 \vee d_1$
	$\neg x_7 \vee x_8 \vee d_2$	$\neg x_7 \vee \neg x_8 \vee x_6 \vee d_3$	$\neg x_7 \vee \neg x_8 \vee \neg x_6 \vee d_4$	$\neg x_1 \vee \neg x_3$

- ▶ unsatisfiable core: $\neg x_1 \vee \neg x_2, \neg x_1 \vee x_2, x_1$
 $\chi = \chi \cup \text{CNF}(b_1 + b_2 + b_3 = 1)$
 $\text{cost} = 1$
- ▶ unsatisfiable core: $\neg x_3 \vee x_4, x_3, \neg x_3 \vee \neg x_4$
 $\chi = \chi \cup \text{CNF}(c_1 + c_2 + c_3 = 1)$
 $\text{cost} = 2$
- ▶ unsatisfiable core: $x_7, \neg x_7 \vee x_8, \neg x_7 \vee \neg x_8 \vee x_6, \neg x_7 \vee \neg x_8 \vee \neg x_6$
 $\chi = \chi \cup \text{CNF}(d_1 + d_2 + d_3 + d_4 = 1)$
 $\text{cost} = 3$
- ▶ unsatisfiable core: $\neg x_1 \vee x_3, \neg x_7 \vee x_2, x_7 \vee x_2, x_1 \vee \neg x_2, \neg x_1 \vee \neg x_3$

Example

χ :	$\neg x_1 \vee x_3$	$\neg x_7 \vee x_2$	$x_7 \vee x_2$	$x_1 \vee \neg x_2$
φ :	$\neg x_1 \vee \neg x_2 \vee b_1$	$\neg x_1 \vee x_2 \vee b_2$	$\neg x_1 \vee x_7$	$x_1 \vee b_3$
	$\neg x_3 \vee x_4 \vee c_1$	$x_3 \vee c_2$	$\neg x_3 \vee \neg x_4 \vee c_3$	$x_4 \vee x_5$
	$\neg x_4 \vee x_5$	$x_1 \vee \neg x_5 \vee x_6$	$x_5 \vee \neg x_6$	$x_7 \vee d_1$
	$\neg x_7 \vee x_8 \vee d_2$	$\neg x_7 \vee \neg x_8 \vee x_6 \vee d_3$	$\neg x_7 \vee \neg x_8 \vee \neg x_6 \vee d_4$	$\neg x_1 \vee \neg x_3 \vee e_1$

- ▶ unsatisfiable core: $\neg x_1 \vee \neg x_2, \neg x_1 \vee x_2, x_1$
 $\chi = \chi \cup \text{CNF}(b_1 + b_2 + b_3 = 1)$
 $\text{cost} = 1$
- ▶ unsatisfiable core: $\neg x_3 \vee x_4, x_3, \neg x_3 \vee \neg x_4$
 $\chi = \chi \cup \text{CNF}(c_1 + c_2 + c_3 = 1)$
 $\text{cost} = 2$
- ▶ unsatisfiable core: $x_7, \neg x_7 \vee x_8, \neg x_7 \vee \neg x_8 \vee x_6, \neg x_7 \vee \neg x_8 \vee \neg x_6$
 $\chi = \chi \cup \text{CNF}(d_1 + d_2 + d_3 + d_4 = 1)$
 $\text{cost} = 3$
- ▶ unsatisfiable core: $\neg x_1 \vee x_3, \neg x_7 \vee x_2, x_7 \vee x_2, x_1 \vee \neg x_2, \neg x_1 \vee \neg x_3$
 $\chi = \chi \cup \text{CNF}(e_1 = 1)$
 $\text{cost} = 4$

Example

$\chi:$	$\neg x_1 \vee x_3$	$\neg x_7 \vee x_2$	$x_7 \vee x_2$	$x_1 \vee \neg x_2$
$\varphi:$	$\neg x_1 \vee \neg x_2 \vee b_1$	$\neg x_1 \vee x_2 \vee b_2$	$\neg x_1 \vee x_7$	$x_1 \vee b_3$
	$\neg x_3 \vee x_4 \vee c_1$	$x_3 \vee c_2$	$\neg x_3 \vee \neg x_4 \vee c_3$	$x_4 \vee x_5$
	$\neg x_4 \vee x_5$	$x_1 \vee \neg x_5 \vee x_6$	$x_5 \vee \neg x_6$	$x_7 \vee d_1$
	$\neg x_7 \vee x_8 \vee d_2$	$\neg x_7 \vee \neg x_8 \vee x_6 \vee d_3$	$\neg x_7 \vee \neg x_8 \vee \neg x_6 \vee d_4$	$\neg x_1 \vee \neg x_3 \vee e_1$

- ▶ unsatisfiable core: $\neg x_1 \vee \neg x_2, \neg x_1 \vee x_2, x_1$
 $\chi = \chi \cup \text{CNF}(b_1 + b_2 + b_3 = 1)$
 $\text{cost} = 1$
- ▶ unsatisfiable core: $\neg x_3 \vee x_4, x_3, \neg x_3 \vee \neg x_4$
 $\chi = \chi \cup \text{CNF}(c_1 + c_2 + c_3 = 1)$
 $\text{cost} = 2$
- ▶ unsatisfiable core: $x_7, \neg x_7 \vee x_8, \neg x_7 \vee \neg x_8 \vee x_6, \neg x_7 \vee \neg x_8 \vee \neg x_6$
 $\chi = \chi \cup \text{CNF}(d_1 + d_2 + d_3 + d_4 = 1)$
 $\text{cost} = 3$
- ▶ unsatisfiable core: $\neg x_1 \vee x_3, \neg x_7 \vee x_2, x_7 \vee x_2, x_1 \vee \neg x_2, \neg x_1 \vee \neg x_3$
 $\chi = \chi \cup \text{CNF}(e_1 = 1)$
 $\text{cost} = 4$
- ▶ satisfiable

Example

χ :	$\neg x_1 \vee x_3$	$\neg x_7 \vee x_2$	$x_7 \vee x_2$	$x_1 \vee \neg x_2$
φ :	$\neg x_1 \vee \neg x_2 \vee b_1$	$\neg x_1 \vee x_2 \vee b_2$	$\neg x_1 \vee x_7$	$x_1 \vee b_3$
	$\neg x_3 \vee x_4 \vee c_1$	$x_3 \vee c_2$	$\neg x_3 \vee \neg x_4 \vee c_3$	$x_4 \vee x_5$
	$\neg x_4 \vee x_5$	$x_1 \vee \neg x_5 \vee x_6$	$x_5 \vee \neg x_6$	$x_7 \vee d_1$
	$\neg x_7 \vee x_8 \vee d_2$	$\neg x_7 \vee \neg x_8 \vee x_6 \vee d_3$	$\neg x_7 \vee \neg x_8 \vee \neg x_6 \vee d_4$	$\neg x_1 \vee \neg x_3 \vee e_1$

- ▶ unsatisfiable core: $\neg x_1 \vee \neg x_2, \neg x_1 \vee x_2, x_1$
 $\chi = \chi \cup \text{CNF}(b_1 + b_2 + b_3 = 1)$
 $\text{cost} = 1$
- ▶ unsatisfiable core: $\neg x_3 \vee x_4, x_3, \neg x_3 \vee \neg x_4$
 $\chi = \chi \cup \text{CNF}(c_1 + c_2 + c_3 = 1)$
 $\text{cost} = 2$
- ▶ unsatisfiable core: $x_7, \neg x_7 \vee x_8, \neg x_7 \vee \neg x_8 \vee x_6, \neg x_7 \vee \neg x_8 \vee \neg x_6$
 $\chi = \chi \cup \text{CNF}(d_1 + d_2 + d_3 + d_4 = 1)$
 $\text{cost} = 3$
- ▶ unsatisfiable core: $\neg x_1 \vee x_3, \neg x_7 \vee x_2, x_7 \vee x_2, x_1 \vee \neg x_2, \neg x_1 \vee \neg x_3$
 $\chi = \chi \cup \text{CNF}(e_1 = 1)$
 $\text{cost} = 4$
- ▶ satisfiable
- ▶ $\text{pminUNSAT}(\chi, \varphi) = 4$

Example

χ :	$\neg x_1 \vee x_3$	$\neg x_7 \vee x_2$	$x_7 \vee x_2$	$x_1 \vee \neg x_2$
φ :	$\neg x_1 \vee \neg x_2 \vee b_1$	$\neg x_1 \vee x_2 \vee b_2$	$\neg x_1 \vee x_7$	$x_1 \vee b_3$
	$\neg x_3 \vee x_4 \vee c_1$	$x_3 \vee c_2$	$\neg x_3 \vee \neg x_4 \vee c_3$	$x_4 \vee x_5$
	$\neg x_4 \vee x_5$	$x_1 \vee \neg x_5 \vee x_6$	$x_5 \vee \neg x_6$	$x_7 \vee d_1$
	$\neg x_7 \vee x_8 \vee d_2$	$\neg x_7 \vee \neg x_8 \vee x_6 \vee d_3$	$\neg x_7 \vee \neg x_8 \vee \neg x_6 \vee d_4$	$\neg x_1 \vee \neg x_3 \vee e_1$

- ▶ unsatisfiable core: $\neg x_1 \vee \neg x_2, \neg x_1 \vee x_2, x_1$
 $\chi = \chi \cup \text{CNF}(b_1 + b_2 + b_3 = 1)$
 $\text{cost} = 1$
- ▶ unsatisfiable core: $\neg x_3 \vee x_4, x_3, \neg x_3 \vee \neg x_4$
 $\chi = \chi \cup \text{CNF}(c_1 + c_2 + c_3 = 1)$
 $\text{cost} = 2$
- ▶ unsatisfiable core: $x_7, \neg x_7 \vee x_8, \neg x_7 \vee \neg x_8 \vee x_6, \neg x_7 \vee \neg x_8 \vee \neg x_6$
 $\chi = \chi \cup \text{CNF}(d_1 + d_2 + d_3 + d_4 = 1)$
 $\text{cost} = 3$
- ▶ unsatisfiable core: $\neg x_1 \vee x_3, \neg x_7 \vee x_2, x_7 \vee x_2, x_1 \vee \neg x_2, \neg x_1 \vee \neg x_3$
 $\chi = \chi \cup \text{CNF}(e_1 = 1)$
 $\text{cost} = 4$
- ▶ satisfiable: $v(x_1) = v(x_2) = v(x_3) = v(x_5) = v(x_7) = \text{T}$ and $v(x_i) = \text{F}$ otherwise
- ▶ $\text{pminUNSAT}(\chi, \varphi) = 4$ and $\text{pmaxSAT}(\chi, \varphi) = 12$

Unsatisfiable Cores in Practice

Unsatisfiable Cores in z3

```
from z3 import *

x1,x2,x3 = Bool("x1"), Bool("x2"), Bool("x3")
phi = [ Or(Not(x1), Not(x2)), Or(Not(x1), x2),\
        Or(Not(x1), x3), x1, Or(Not(x3), x2)]

solver = Solver()
solver.set(unsat_core=True)

# assert clauses in phi with names phi0 ... phi4
for i,c in enumerate(phi):
    solver.assert_and_track(c, "phi" + str(i))

if solver.check() == z3.unsat:
    uc = solver.unsat_core()
    print(uc) # [phi0, phi1, phi3]
```




Nachum Dershowitz, Ziyad Hanna, and Alexander Nadel.

A Scalable Algorithm for Minimal Unsatisfiable Core Extraction.

Proc. Theory and Applications of Satisfiability Testing, pp. 36–41, 2006.



Yoonna Oh, Maher Mneimneh, Zaher Andraus, Karem Sakallah, and Igor Markov

AMUSE: A Minimally-Unsatisfiable Subformula Extractor.

Proc. 41st Design Automation Conference, pp. 518–523, 2004.



Zhaohui Fu and Sharad Malik.

On solving the partial MAX-SAT problem.

In Proc. Theory and Applications of Satisfiability Testing, pp. 252–265, 2006