

Functional Programming

WS 2015/16

Cezary Kaliszyk (VO+PS)

Yann Savoye (PS)

Łukasz Czajka (PS)

Computational Logic
Institute of Computer Science
University of Innsbruck

week 9



Overview

- Week 9 - Efficiency
 - Summary of Week 8
 - Fibonacci Numbers
 - Tupling
 - Tail Recursion



Overview

- Week 9 - Efficiency
 - Summary of Week 8
 - Fibonacci Numbers
 - Tupling
 - Tail Recursion



Isabelle/HOL

- LCF approach and small trusted kernel
- Higher order logic
- Proofs by induction, simplifier and tableaux
- Code generation

Overview

- Week 9 - Efficiency
 - Summary of Week 8
 - Fibonacci Numbers
 - Tupling
 - Tail Recursion



This Week

Practice I

OCaml introduction, lists, strings, trees

Theory I

lambda-calculus, evaluation strategies, induction, reasoning about functional programs

Practice II

efficiency, tail-recursion, combinator-parsing,

Theory II

type checking, type inference

Advanced Topics

lazy evaluation, infinite data structures, dependent types, monads

Overview

- Week 9 - Efficiency
 - Summary of Week 8
 - **Fibonacci Numbers**
 - Tupling
 - Tail Recursion



Mathematical

Definition (n -th Fibonacci number)


$$\text{fib}(n) \stackrel{\text{def}}{=} \begin{cases} n & \text{if } n \leq 1 \\ \text{fib}(n-1) + \text{fib}(n-2) & \text{otherwise} \end{cases}$$

Mathematical

Definition (n -th Fibonacci number)

$$\text{fib}(n) \stackrel{\text{def}}{=} \begin{cases} n & \text{if } n \leq 1 \\ \text{fib}(n-1) + \text{fib}(n-2) & \text{otherwise} \end{cases}$$

Graph



Mathematical (cont'd)

Example

0, 1

Mathematical (cont'd)

Example

0, 1, 1

Mathematical (cont'd)

Example

0, 1, 1, 2

Mathematical (cont'd)

Example

0, 1, 1, 2, 3

Mathematical (cont'd)

Example

0, 1, 1, 2, 3, 5

Mathematical (cont'd)

Example

0, 1, 1, 2, 3, 5, 8

Mathematical (cont'd)

Example

0, 1, 1, 2, 3, 5, 8, 13

Mathematical (cont'd)

Example

0, 1, 1, 2, 3, 5, 8, 13, 21

Mathematical (cont'd)

Example


0, 1, 1, 2, 3, 5, 8, 13, 21, 34, 55, 89, 144, 233, 377, 610, 987, 1597,
2584, 4181, 6765, 10946, 17711, 28657, 46368, 75025, 121393, 196418,
317811, 514229, 832040, 1346269, 2178309, 3524578, 5702887,
9227465, 14930352, 24157817, 39088169, 63245986, 102334155,
165580141, 267914296, 433494437, 701408733, 1134903170,
1836311903, 2971215073, ...

OCaml

Definition

```
let rec fib n = if n < 2 then n else fib(n-1) + fib(n-2)
```

Example

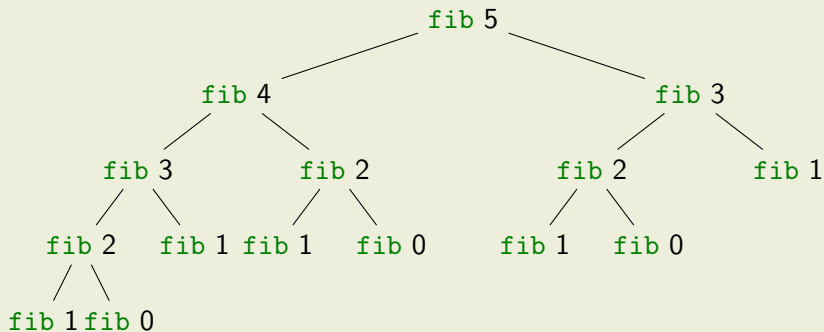

Overview

- Week 9 - Efficiency
 - Summary of Week 8
 - Fibonacci Numbers
 - **Tupling**
 - Tail Recursion



Tupling

Idea

- use tuples to return more than one result
- make results available as return values instead of recomputing them

Fibonacci Numbers

Example

```
let rec fibpair n = if n < 1 then (0, 1) else
  let (f1, f2) = fibpair (n - 1) in (f2, f1 + f2);;
```

Fibonacci Numbers

Example

```
let rec fibpair n = if n < 1 then (0, 1) else
  let (f1, f2) = fibpair (n - 1) in (f2, f1 + f2);;
```

- this function is **linear**

Fibonacci Numbers

Example

```
let rec fibpair n = if n < 1 then (0, 1) else
  let (f1, f2) = fibpair (n - 1) in (f2, f1 + f2);;
```

- this function is **linear**

Lemma

$$\text{fibpair}(n) = (\text{fib } n, \text{fib}(n + 1))$$

Fibonacci Numbers

Example

```
let rec fibpair n = if n < 1 then (0, 1) else
  let (f1, f2) = fibpair (n - 1) in (f2, f1 + f2);;
```

- this function is **linear**

Lemma

$$\text{fibpair}(n) = (\text{fib } n, \text{fib}(n + 1))$$

Proof.

Blackboard □

A Second Example

Goal

compute average value of an integer list (module IntLst)

Naive Approach

- `let average xs = sum xs / Lst.length xs`

A Second Example

Goal

compute average value of an integer list (module IntLst)

Naive Approach

- `let average xs = sum xs / Lst.length xs`
- 2 traversals of `xs` are done

A Second Example

Goal

compute average value of an integer list (module IntLst)

Naive Approach

- `let average xs = sum xs / Lst.length xs`
- 2 traversals of `xs` are done

Combined Function

- `let rec sumlen = function`
 - | [] → (0,0)
 - | x::xs → `let (sum,len) = sumlen xs in (sum+x,len+1)`
- `let average1 xs = let (sum,len) = sumlen xs in sum/len`

A Second Example

Goal

compute average value of an integer list (module IntLst)

Naive Approach

- `let average xs = sum xs / Lst.length xs`
- 2 traversals of `xs` are done

Combined Function

- `let rec sumlen = function`
 - | [] → (0,0)
 - | x::xs → `let (sum,len) = sumlen xs in (sum+x,len+1)`
- `let average1 xs = let (sum,len) = sumlen xs in sum/len`
- one traversal of `xs` suffices

Overview

- Week 9 - Efficiency
 - Summary of Week 8
 - Fibonacci Numbers
 - Tupling
 - Tail Recursion



Recursion vs. Tail Recursion

Idea

- a function calling itself is recursive
- functions that mutually call each other are mutually recursive
- special kind of recursion is tail recursion

Recursion vs. Tail Recursion

Idea

- a function calling itself is **recursive**
- functions that mutually call each other are mutually recursive
- special kind of recursion is tail recursion

Recursion vs. Tail Recursion

Idea

- a function calling itself is recursive
- functions that mutually call each other are **mutually recursive**
- special kind of recursion is tail recursion

Recursion vs. Tail Recursion

Idea

- a function calling itself is recursive
- functions that mutually call each other are mutually recursive
- special kind of recursion is **tail recursion**

Recursion vs. Tail Recursion

Idea

- a function calling itself is recursive
- functions that mutually call each other are mutually recursive
- special kind of recursion is tail recursion

Definition (Tail recursion)

a function is called **tail recursive** if the recursive call is last action in the function body

Examples

Length

- `let rec length = function [] -> 0
 | _::xs -> 1 + length xs`

Examples

Length

- `let rec length = function [] -> 0`
 | `_::xs -> 1 + length xs`
- **not** tail recursive

Examples

Length

- `let rec length = function [] -> 0`
 | `_::xs -> 1 + length xs`
- **not** tail recursive

Even/Odd

- `let rec is_even = function 0 -> true`
 | `1 -> false`
 | `n -> is_odd(n-1)`
`and is_odd = function 0 -> false`
 | `1 -> true`
 | `n -> is_even(n-1)`

Examples

Length

- `let rec length = function [] -> 0`
 | `_::xs -> 1 + length xs`
- **not** tail recursive

Even/Odd

- `let rec is_even = function 0 -> true`
 | `1 -> false`
 | `n -> is_odd(n-1)`
`and is_odd = function 0 -> false`
 | `1 -> true`
 | `n -> is_even(n-1)`
- mutually recursive (btw: also tail recursive)

Parameter Accumulation

Idea

- make function tail recursive
- provide data as input instead of computing it before recursive call
- Why? (tail recursive functions can automatically be transformed into space-efficient loops)

Example (Range)

- `let rec range m n = if m >= n then []
 else m::range (m+1) n`

Example (Range)

- `let rec range m n = if m >= n then []
 else m::range (m+1) n`
- **not** tail recursive

Example (Range)

- `let rec range m n = if m >= n then []
 else m::range (m+1) n`
- **not** tail recursive
- `let range_tl m n =
 let rec range acc m n =
 if m >= n then acc else range ((n-1)::acc) m (n-1)
 in
 range [] m n`

Example (Range)

- `let rec range m n = if m >= n then []
 else m::range (m+1) n`
- **not** tail recursive
- `let range_tl m n =
 let rec range acc m n =
 if m >= n then acc else range ((n-1)::acc) m (n-1)
 in
 range [] m n`
- tail recursive

Example (Sumlen)

- `let rec sumlen = function`
 - | [] -> (0,0)
 - | x::xs -> `let (sum,len) = sumlen xs in (sum+x,len+1)`

Example (Sumlen)

- `let rec sumlen = function`
 - | [] -> (0,0)
 - | x::xs -> `let (sum,len) = sumlen xs in (sum+x,len+1)`
- **not** tail recursive

Example (Sumlen)

- `let rec sumlen = function`
 - | [] -> (0,0)
 - | x::xs -> `let (sum,len) = sumlen xs in (sum+x,len+1)`
- **not** tail recursive
- `let sumlen_tl xs =`
 - `let rec sumlen sum len = function`
 - | [] -> (sum,len)
 - | x::xs -> `sumlen (sum+x) (len+1) xs`
 - `in`
 - `sumlen 0 0 xs`

Example (Sumlen)

- `let rec sumlen = function`
 - | [] -> (0,0)
 - | x::xs -> `let (sum,len) = sumlen xs in (sum+x,len+1)`
- **not** tail recursive
- `let sumlen_tl xs =`
 - `let rec sumlen sum len = function`
 - | [] -> (sum,len)
 - | x::xs -> `sumlen (sum+x) (len+1) xs`
 - `in`
 - `sumlen 0 0 xs`
- tail recursive

Example (Sumlen)

- `let rec sumlen = function`
 - | [] -> (0,0)
 - | x::xs -> `let (sum,len) = sumlen xs in (sum+x,len+1)`
- **not** tail recursive
- `let sumlen_tl xs =`
 - `let rec sumlen sum len = function`
 - | [] -> (sum,len)
 - | x::xs -> `sumlen (sum+x) (len+1) xs`
 - `in`
 - `sumlen 0 0 xs`
- tail recursive
- `let sumlen_fold xs =`
 - `Lst.foldl (fun (sum,len) x -> (sum+x,len+1)) (0,0) xs`

Example (Sumlen)

- `let rec sumlen = function`
 - | [] -> (0,0)
 - | x::xs -> `let (sum,len) = sumlen xs in (sum+x,len+1)`
- **not** tail recursive
- `let sumlen_tl xs =`
 - `let rec sumlen sum len = function`
 - | [] -> (sum,len)
 - | x::xs -> `sumlen (sum+x) (len+1) xs`
 - `in`
 - `sumlen 0 0 xs`
- tail recursive
- `let sumlen_fold xs =`
 - `Lst.foldl (fun (sum,len) x -> (sum+x,len+1)) (0,0) xs`
- tail recursive

Examples (Reverse)

- `let rec reverse = function [] -> []
| x::xs -> (reverse xs) @ [x]`
- **not** tail recursive

Examples (Reverse)

- `let rec reverse = function [] -> []
| x::xs -> (reverse xs) @ [x]`
- **not** tail recursive
- `let rev xs =
 let rec rev acc = function [] -> acc
 | x::xs -> rev (x::acc) xs

 in
 rev [] xs`

Examples (Reverse)

- `let rec reverse = function [] -> []
| x::xs -> (reverse xs) @ [x]`
- **not** tail recursive
- `let rev xs =
 let rec rev acc = function [] -> acc
 | x::xs -> rev (x::acc) xs

 in
 rev [] xs`
- tail recursive

Examples (Reverse)

- `let rec reverse = function [] -> []
| x::xs -> (reverse xs) @ [x]`
- **not** tail recursive
- `let rev xs =
 let rec rev acc = function [] -> acc
 | x::xs -> rev (x::acc) xs

 in
 rev [] xs`
- tail recursive
- `let rev xs = Lst.foldl (fun acc x -> x::acc) [] xs`

Examples (Reverse)

- `let rec reverse = function [] -> []
 | x::xs -> (reverse xs) @ [x]`
- not tail recursive
- `let rev xs =
 let rec rev acc = function [] -> acc
 | x::xs -> rev (x::acc) xs
 in
 rev [] xs`
- tail recursive
- `let rev xs = Lst.foldl (fun acc x -> x::acc) [] xs`
- tail recursive